



JDG Series AGM-GEL battery

6-EVF-90


General Features

- Nanosilica colloidal electrolyte and high tin positive plate alloy design to enhance battery performance
- Relatively rich electrolyte, high temperature and low temperature performance is superior
- Long cycle life, excellent deep cycle discharge ability
- Excellent charge acceptance ability
- Precision sealing technology
- Long life



Dimension: 307(L) × 168(W) × 211(H) × 214(TH)

Unit: mm

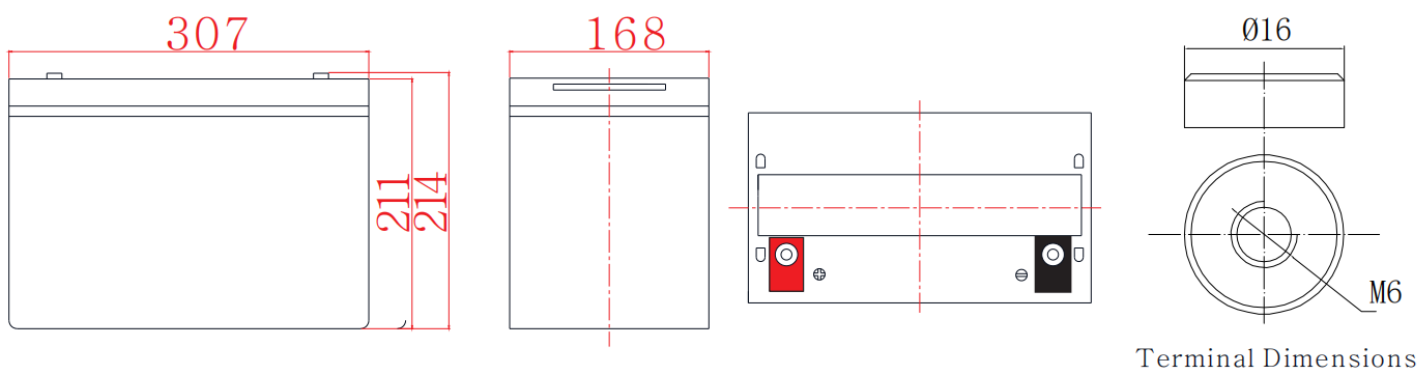

Specification

Nominal Voltage	12V
Nominal Capacity	90Ah
Design life	10 years
Terminal	M6
Approx. Weight	Approx. 30.2kg ± 3% (66.6lbs ± 3%)
Container Material	ABS
short-circuit current	2666A
Internal resistance (Full charged at 25°C:)	4.5 mΩ
Self discharge	3% of capacity declined per month at 25°C

Operating Temperature

Discharge:	-20 ~ 50°C (-4 ~ 122°F)
Charge :	-20 ~ 50°C (-4 ~ 122°F)
Storage:	-20 ~ 50°C (-4 ~ 122°F)

Charge Method (25 °C)

Charge current:	Max. 22.5A; Recom. 9.0A
Float charge: 13.5-13.8V	recom. 13.8V (-18mV/°C)
Equalize charge: 13.8-14.1V	recom. 14.1V (-24mV/°C)
Cycle charge: 14.4-15.0V	recom. 14.7V (-30mV/°C)

Standards

Executive standard GB/T 32620.1-2016

Applications

- UPS/EPS
- Power systems
- Telecommunications system
- Emergency lighting, Auto control system
- Solar/wind generating storage cyclic
- Motive Power Applications

Rated Capacity

20Hour Rate (4.50A to 10.5V)	90.0Ah
3Hour Rate (21.4A to 10.2V)	64.2Ah
1Hour Rate (49.7A to 9.6V)	49.7Ah

Attain Certificate




Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.




JDG Series AGM-GEL battery

6-EVF-90


Discharge characteristic

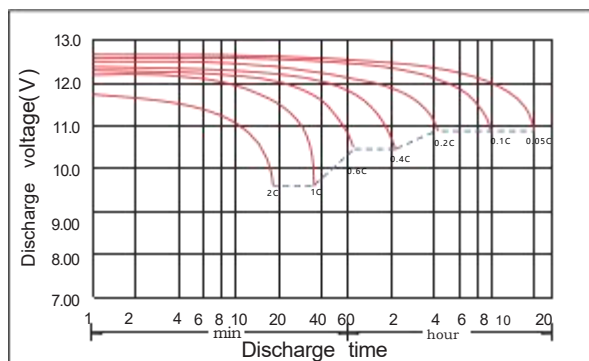


Charging characteristic

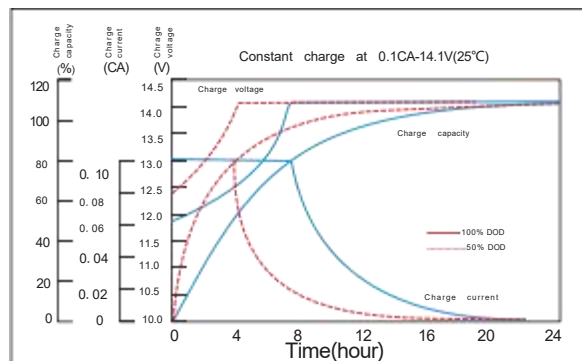

The effect of temperature on capacity

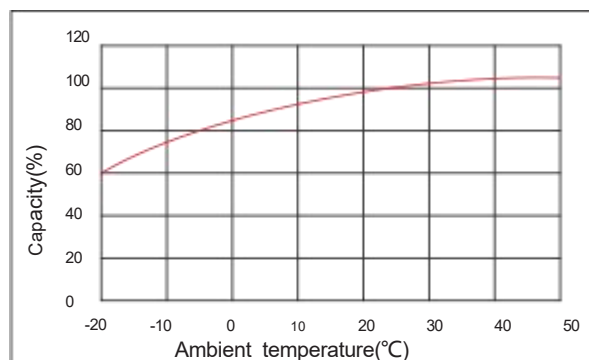

The effect of temperature on float life

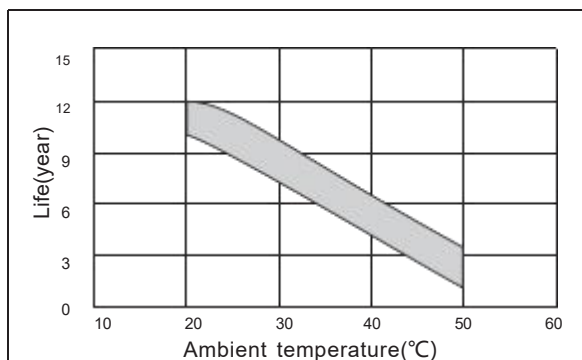

Constant Current Discharge Characteristics Unit:A (25°C,77°F)

FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	214	173	116	73.9	61.0	49.7	36.3	31.7	22.3	17.4	15.1	12.9	10.0	8.91	4.86
1.65V	210	170	114	72.4	59.9	48.9	35.6	31.1	21.9	17.0	14.9	12.6	9.79	8.74	4.78
1.70V	206	167	111	71.1	58.9	48.0	34.9	30.6	21.4	16.8	14.6	12.4	9.62	8.59	4.67
1.75V	202	164	109	69.9	57.8	47.1	34.2	30.0	21.1	16.4	14.3	12.1	9.43	8.42	4.50
1.80V	194	157	105	67.1	55.5	45.2	32.9	28.9	20.2	15.8	13.8	11.7	9.06	8.10	4.29
1.85V	185	148	99.2	62.4	52.0	42.4	30.7	27.2	19.3	14.7	13.2	10.9	8.61	7.54	3.96

Constant Power Discharge Characteristics Unit: W/cell (25°C ,77°F)

FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	412	300	223	142	115	96.0	72.3	61.1	42.9	34.3	29.1	25.1	19.2	17.1	9.54
1.65V	404	294	219	140	113	94.3	71.1	60.0	42.2	33.7	28.7	24.7	18.9	16.8	9.36
1.70V	397	288	215	137	111	92.4	69.7	58.9	41.4	33.0	28.1	24.2	18.5	16.5	9.17
1.75V	389	283	211	135	109	90.6	68.5	57.6	40.5	32.4	27.6	23.8	18.2	16.2	9.00
1.80V	374	272	202	129	105	87.2	65.8	55.5	39.0	31.2	26.6	22.9	17.5	15.6	8.66
1.85V	355	257	192	125	99.0	82.5	62.7	53.1	36.6	29.7	25.1	21.8	16.6	14.8	8.25