



JPC Series lead-Carbon battery

JPC12-95


General Features

- ▶ Lead-carbon composite negative plate, both capacitance and battery characteristics
- ▶ Long cycle life, excellent deep cycle discharge ability
- ▶ Excellent charge acceptance ability
- ▶ Optimized capability of instant high-current discharging
- ▶ Strong high and low temperature performance
- ▶ Precision sealing technology



Dimension: 307(L) × 168(W) × 211(H) × 214(TH)

Unit: mm

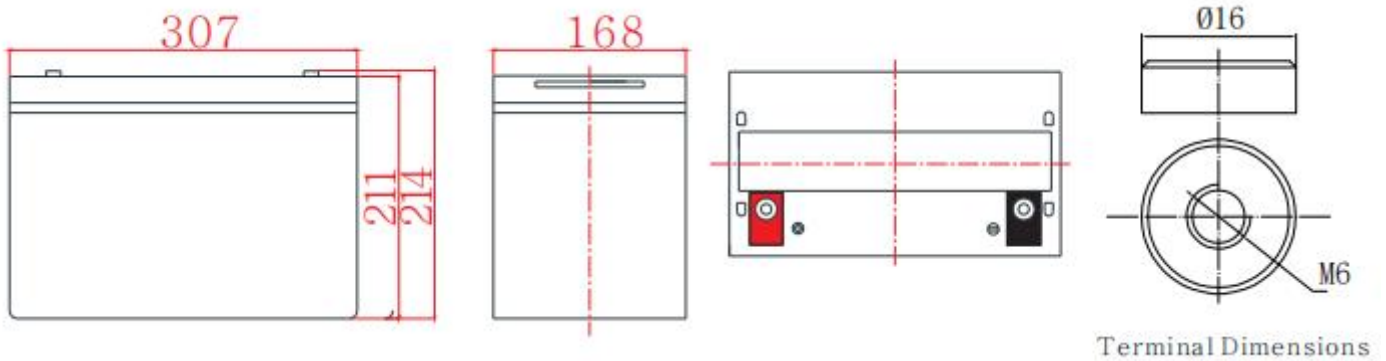

Specification	
Nominal Voltage	12V
Nominal Capacity	95Ah
Design life	10 years
Terminal	M6
Approx. Weight	Approx 28.0kg (61.7lbs)
Container Material	ABS
short-circuit current	2181A
Internal resistance(Full charged at 25°C:)	5.5 mΩ
Self discharge	3% of capacity declined per month at 25°C
Operating Temperature	
Discharge:	-20 ~50°C(-4~ 122°F)
Charge :	-20 ~50°C(-4~ 122°F)
Storage:	-20 ~50°C(-4~ 122°F)
Charge Method(25 °C)	
Charge current:	Max. 23.75A; Recom. 9.5A
Float charge: 13.5-13.8V	recom. 13.8V(-18mV/ °C)
Equalize charge: 13.8-14.1V	recom. 14.1V(-24mV/ °C)
Cycle charge: 14.4-15.0V	recom. 14.7V(-30mV/ °C)

Standards

Executive standard YD/T 799-2010

Applications

- ▶ Solar/ wind energy and other new energy storage
- ▶ Hybrid vehicles, electric bicycles and other new energy vehicles
- ▶ Other backup or cycle purposes

Rated Capacity


10Hour Rate (9.50A to 10.8V)	95.0Ah
3Hour Rate (26.0A to 10.2V)	78.0Ah
1Hour Rate (64.0A to 9.6V)	64.0Ah

Attain Certificate




Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.


Discharge characteristic

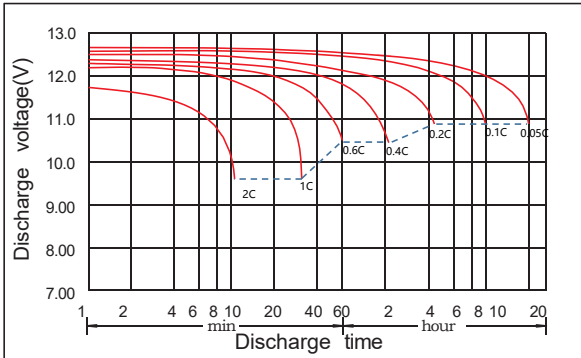


Charging characteristic

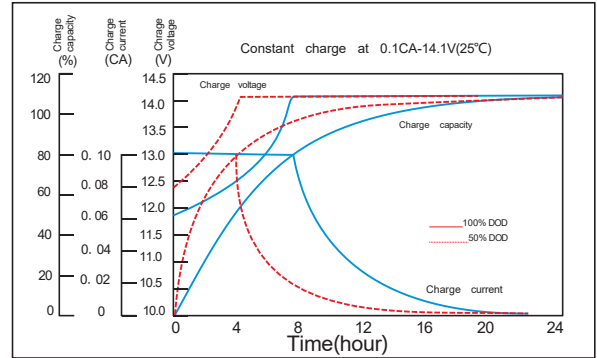

The effect of temperature on capacity

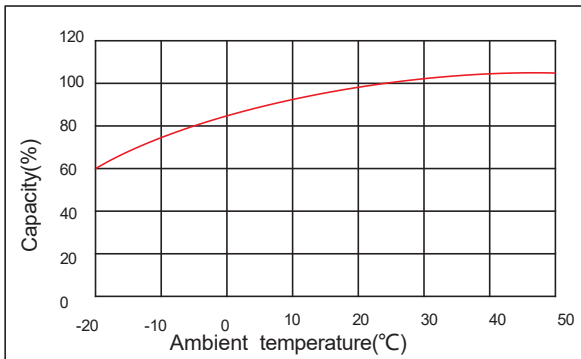

The effect of discharge depth on cycle life

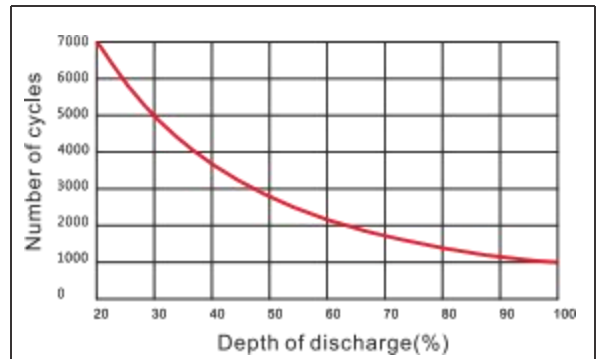

Constant Current Discharge Characteristics Unit:A (25°C,77°F)

FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	335	223	179	110	78.5	64.0	40.2	36.7	26.6	19.3	17.8	14.2	11.7	9.88	5.18
1.65V	324	221	174	108	77.9	63.5	39.8	36.5	26.4	19.1	17.7	14.1	11.6	9.79	5.16
1.70V	311	220	171	106	77.4	63.1	39.4	36.2	26.0	18.9	17.5	14.0	11.5	9.69	5.13
1.75V	286	216	165	105	76.3	62.2	39.0	35.7	25.7	18.7	17.3	13.8	11.4	9.60	5.11
1.80V	257	211	154	100	74.3	60.6	38.6	35.0	25.5	18.5	16.9	13.7	11.4	9.50	5.09
1.85V	229	195	137	91.4	68.9	56.2	37.5	33.3	24.1	18.0	16.0	13.3	10.9	9.22	4.99

Constant Power Discharge Characteristics Unit: W/cell (25°C ,77°F)

FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	562	379	317	198	146	121	80.2	69.4	50.7	38.0	33.9	27.9	22.8	19.0	10.3
1.65V	539	375	311	196	144	120	79.3	69.1	50.0	37.6	33.7	27.6	22.6	18.8	10.2
1.70V	537	372	307	196	143	119	78.4	68.9	49.7	37.2	33.5	27.2	22.5	18.6	10.2
1.75V	500	369	306	195	142	118	78.0	68.5	49.4	36.9	33.3	27.1	22.4	18.5	10.1
1.80V	460	366	289	190	141	117	77.1	68.3	49.3	36.5	32.8	26.8	22.2	18.3	10.1
1.85V	411	339	259	174	130	109	75.7	65.2	46.9	35.9	31.4	26.3	21.4	17.9	10.0