



JPC Series lead-Carbon battery

JPC6-420





General Features

- Lead-carbon composite negative plate, both capacitance and battery characteristics
- Long cycle life, excellent deep cycle discharge ability
- Excellent charge acceptance ability
- Optimized capability of instant high-current discharging
- Strong high and low temperature performance
- Precision sealing technology



Dimension:295(L)×178(W) ×404(H)×407(TH)

Unit: mm

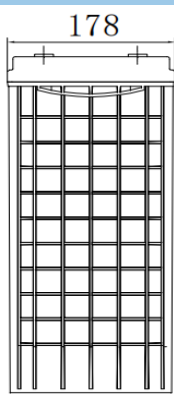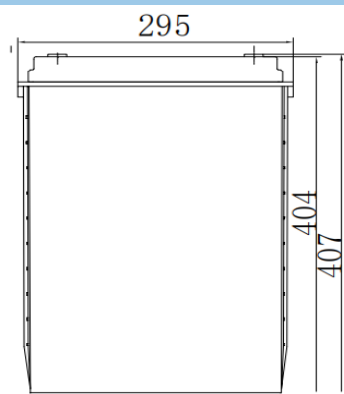

Terminal Dimensions

Specification

Nominal Voltage	6V
Nominal Capacity	420Ah
Design life	15 years
Terminal	M8
Approx. Weight	Approx59.0kg (130.0lbs)
Container Material	ABS
short-circuit current	4000A
Internal resistance(Full charged at 25°C:)	1.5 mΩ
Self discharge	3% of capacity declined per month at 25°C

Operating Temperature

Discharge:	-20 ~50°C(-4~ 122°F)
Charge :	-20 ~50°C(-4~ 122°F)
Storage:	-20 ~50°C(-4~ 122°F)

Charge Method(25 °C)

Charge current:	Max. 84.0A;Recom.42.0A
Float charge:6.75-6.90V	recom.6.90V(-9mV/ °C)
Equalize charge:6.90-7.05V	recom.7.05V(-12mV/ °C)
Cycle charge:7.20-7.50V	recom.7.20V(-15mV/ °C)

Standards

Executive standard GB/T 32620.1-2016

Applications

- Solar/ wind energy and other new energy storage
- Hybrid vehicles, electric bicycles and other new energy vehicles
- Other backup or cycle purposes

Rated Capacity


20Hour Rate (21.0A to 5.25V)	420.0Ah
3Hour Rate (112A to 5.10V)	336.0Ah
1Hour Rate (258A to 4.80V)	258.0Ah

Attain Certificate


	RoHS
--	-------------

Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.


Discharge characteristic

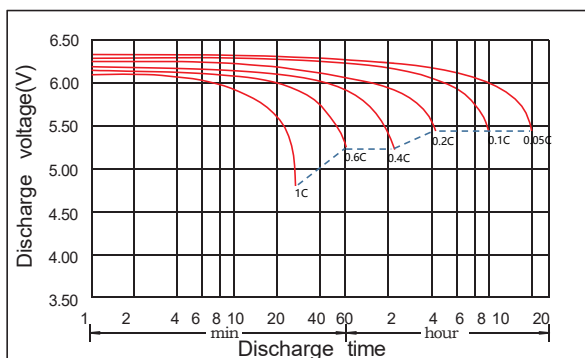


Charging characteristic

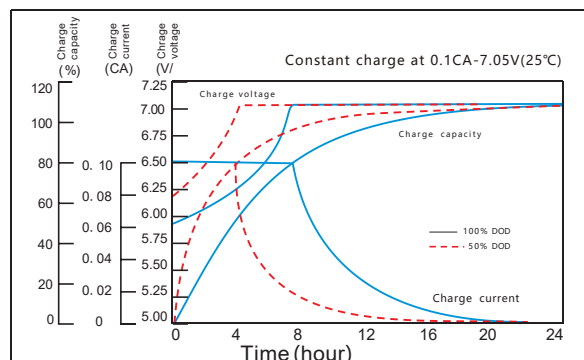

The effect of temperature on capacity

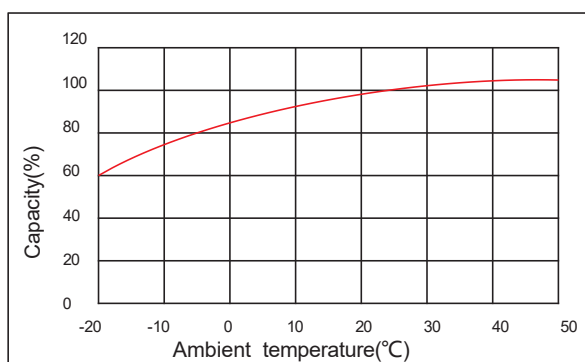

The effect of temperature on float life

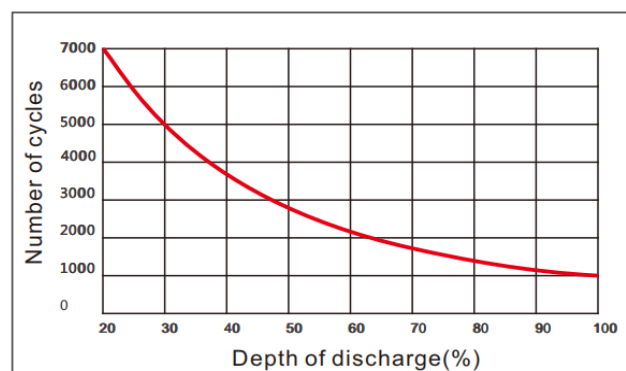

Constant Current Discharge Characteristics Unit:A (25°C,77°F)

FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	306	306	306	306	306	258	174	160	115	83.1	77.0	61.5	50.6	42.6	21.9
1.65V	301	301	301	301	301	257	172	158	114	82.3	76.4	61.0	50.2	42.3	21.6
1.70V	289	289	289	289	289	255	170	156	112	81.4	75.6	60.3	49.8	41.8	21.3
1.75V	266	266	266	266	266	252	169	154	111	80.8	74.8	59.8	49.4	41.5	21.0
1.80V	238	238	238	238	238	245	167	151	110	80.0	72.6	59.0	49.0	41.0	20.7
1.85V	212	212	212	212	212	227	162	143	103	77.6	69.0	57.4	47.0	39.8	20.2

Constant Power Discharge Characteristics Unit: W/cell (25°C ,77°F)

FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	520	520	520	520	520	493	338	310	223	161	149	120	98.5	83.1	43.0
1.65V	512	512	512	512	512	491	334	306	221	160	148	119	97.9	82.5	42.4
1.70V	491	491	491	491	491	487	330	302	217	158	147	117	97.3	81.5	41.8
1.75V	452	452	452	452	452	481	328	298	215	157	145	116	96.5	80.9	41.2
1.80V	404	404	404	404	404	468	324	292	213	155	141	114	95.5	79.9	40.6
1.85V	363	363	363	363	363	437	316	280	202	151	135	112	92.1	78.1	39.8