

## JS12-8.5





### General Features

- High corrosion resistant performance: Pb-Ca multi-alloy grid
- High energy density and power density
- Optimized capability of instant high-current discharging
- Excellent charge acceptance ability
- Excellent deep cycle discharge capability
- Strong high and low temperature performance
- Precision sealing technology



Dimension: 151(L)×65(W)×94(H)×100(TH) Unit: mm

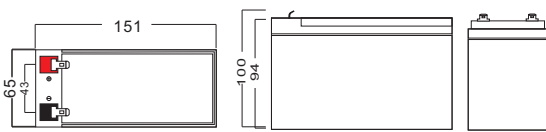

### Applications

- UPS/EPS
- Power systems
- Telecommunications system
- Emergency lighting, Auto control system
- Solar/wind generating storage cyclic
- Other general purpose

### Specification

Nominal Voltage	12V
Nominal Capacity	8.5Ah
Design life	5 years
Terminal	F1/F2/F3
Approx. Weight	Approx 2.26kg (4.98lbs)
Container Material	ABS
Rated Capacity	<b>8.50Ah</b> 20Hour Rate (0.425A to 10.5V)
	<b>6.45Ah</b> 3Hour Rate (2.15A to 10.2V)
	<b>5.41Ah</b> 1Hour Rate (5.41A to 9.60V)
Internal resistance	Full charged at 25°C: 25.0 mΩ
Max. Discharge Current	102A(5S)
Operating Temperature	Discharge: -20 ~50°C(-4~ 122°F)
	Charge: -20 ~50°C(-4~ 122°F)
	Storage: -20 ~50°C(-4~ 122°F)
Charge current:	Max.2.10A ; Recom.0.85A
Charge Method (25 °C)	Float Charge:13.5-13.8V,recom.13.8V(-18mV/ °C) Equalize charge:13.8-14.1V,recom.14.1V(-24mV/ °C) Cycle charge:14.4-15.0V,recom.14.7V(-30mV/ °C)
Self discharge	3% of capacity declined per month at 25°C

### Constant Current Discharge Characteristics Unit: A (25°C, 77°F)


FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	32.4	21.1	15.7	10.3	6.64	5.41	3.30	3.09	2.26	1.81	1.54	1.17	1.02	0.811	0.451
1.65V	32.1	20.2	14.5	9.80	6.23	5.08	3.27	2.97	2.19	1.75	1.51	1.16	1.00	0.803	0.442
1.70V	26.4	19.0	13.5	9.51	6.04	4.92	3.20	2.92	2.15	1.66	1.50	1.13	0.983	0.787	0.434
1.75V	24.4	18.2	12.5	9.30	5.81	4.74	3.13	2.85	2.12	1.64	1.42	1.11	0.959	0.770	0.425
1.80V	22.5	17.0	11.6	8.96	5.62	4.58	3.07	2.77	2.01	1.61	1.37	1.09	0.934	0.754	0.408
1.85V	20.1	15.8	10.3	8.21	5.20	4.24	2.97	2.63	1.89	1.56	1.31	1.05	0.895	0.731	0.401

### Constant Power Discharge Characteristics Unit: W/cell(25°C, 77°F)


FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	60.8	38.1	28.9	17.4	11.9	9.92	6.63	5.81	4.27	3.43	2.91	2.30	1.92	1.57	0.893
1.65V	56.0	36.0	27.0	17.3	11.2	9.33	6.54	5.58	4.15	3.32	2.86	2.27	1.89	1.55	0.868
1.70V	51.2	35.0	25.8	17.2	10.9	9.05	6.46	5.48	4.09	3.15	2.78	2.24	1.87	1.53	0.862
1.75V	46.5	33.9	24.9	17.0	10.5	8.78	6.33	5.36	4.02	3.11	2.71	2.20	1.79	1.50	0.843
1.80V	41.7	32.7	23.8	16.9	10.4	8.66	6.16	5.32	3.92	3.08	2.65	2.14	1.73	1.46	0.837
1.85V	37.2	30.6	21.3	15.5	9.72	8.10	6.06	5.08	3.73	3.03	2.53	2.11	1.66	1.44	0.829

## JS12-8.5


Discharge characteristic

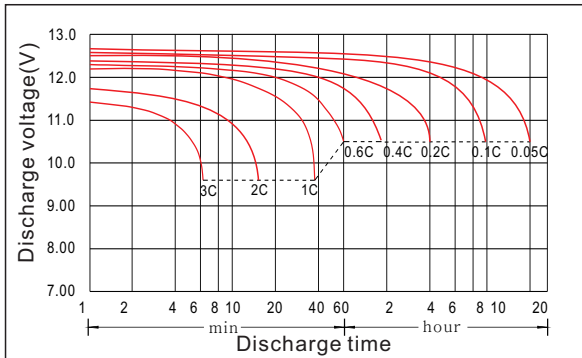


Charging characteristic

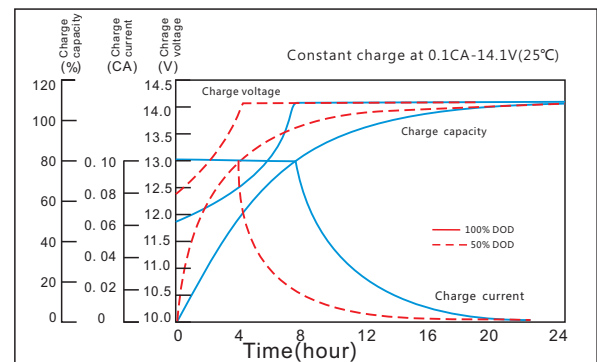


The effect of temperature on capacity

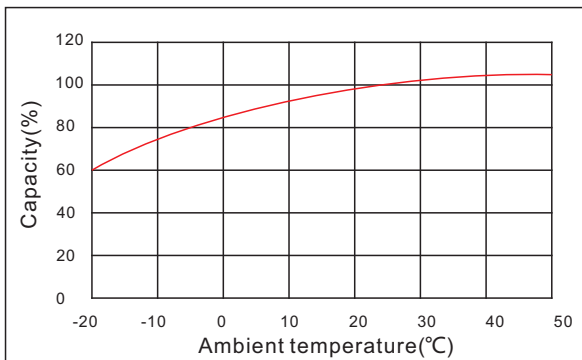


The effect of discharge depth on cycle life

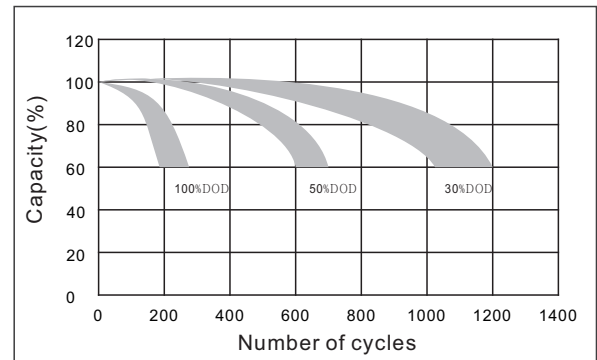

Curves of self-discharge

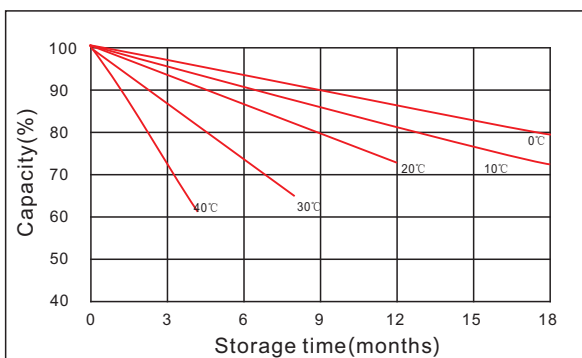

The effect of temperature on float life

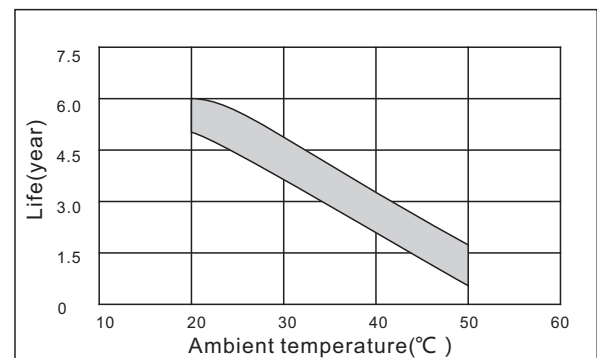

[www.kijo.com.cn](http://www.kijo.com.cn)    [info@kijo.com.cn](mailto:info@kijo.com.cn)

**Jiangxi Jingjiu Power Science&Technology Co. Ltd.**  
Add: 1388 Fushan No.1 Street, Xiaolan Economic Development Zone, Nanchang City, Jiangxi Province, China.

+86-791-85982779    +86-791-85989842

**Jiangxi Jingjiu Power ( Jiujiang ) Co. Ltd.**  
Add: Xiwang Rd, Aicheng Industrial Park, Yongxiu Country, jiujiang City, Jiangxi Province, China.

