



JS Series lead-acid battery JS6-4.5




General Features

- High corrosion resistant performance: Pb-Ca multi-alloy grid
- High energy density and power density
- Optimized capability of instant high-current discharging
- Excellent charge acceptance ability
- Excellent deep cycle discharge capability
- Strong high and low temperature performance
- Precision sealing technology



Dimension:70(L)×47(W) ×101(H)×106(TH)/(±2.0)

Unit: mm

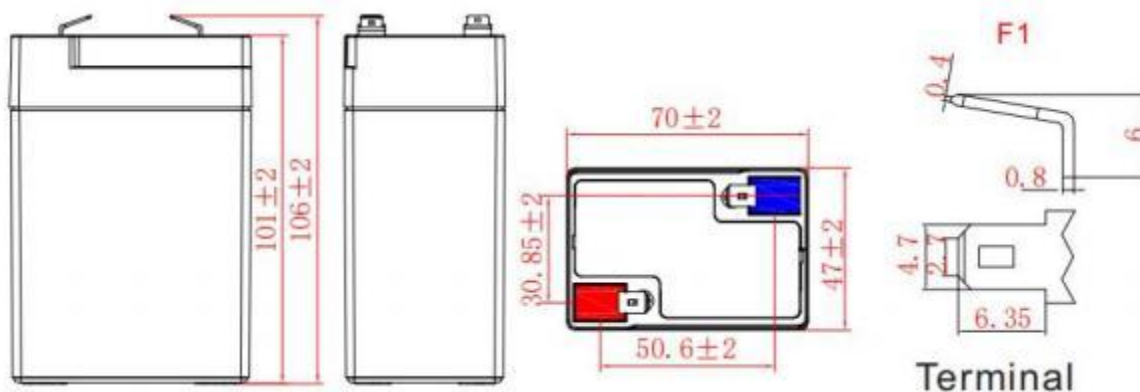

Specification

Nominal Voltage	6V
Nominal Capacity	4.5Ah@20hour-rate to 1.75V per cell @25°C
Design life	5 years
Terminal	F1/F2
Approx. Weight	Approx0.75kg±3% (1.65lbs±3%)
Container Material	ABS(UL94-HB, UL94-V0 Optional)
short-circuit current	200A
Internal resistance(Full charged at 25°C:)	30.0 mΩ
Self discharge	3% of capacity declined per month at 25°C

Operating Temperature

Discharge:	-20 ~50°C(-4~ 122°F)
Charge :	-20 ~50°C(-4~ 122°F)
Storage:	-20 ~50°C(-4~ 122°F)

Charge Method(25 °C)

Charge current:	Max. 1.25A;Recom.0.50A
Float charge:6.75-6.90V	recom.6.75V(-9mV/ °C)
Equalize charge:6.90-7.05V	recom.7.05V(-12mV/ °C)
Cycle charge:7.20-7.50V	recom.7.35V(-15mV/ °C)

Standards

Executive standard: IEC 61056-2,
GB/T 19639.1-2014

Applications

- UPS/EPS
- Power systems
- Telecommunications system
- Emergency lighting、Auto control system
- Solar/wind generating storage cyclic
- Other general purpose

Rated Capacity


20Hour Rate (0.225A to 5.25V)	4.5Ah
3Hour Rate (1.303A to 5.10V)	3.909Ah
1Hour Rate (3.090A to 4.80V)	3.090Ah

Attain Certificate




Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.


Discharge characteristic

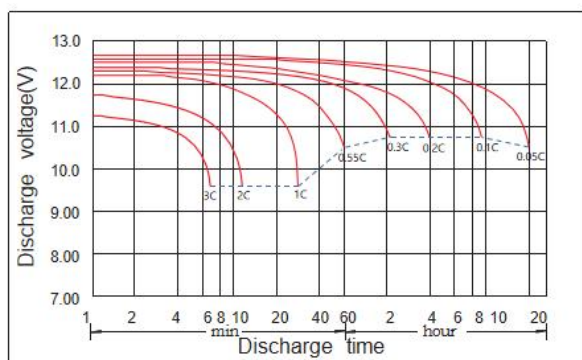


Charging characteristic

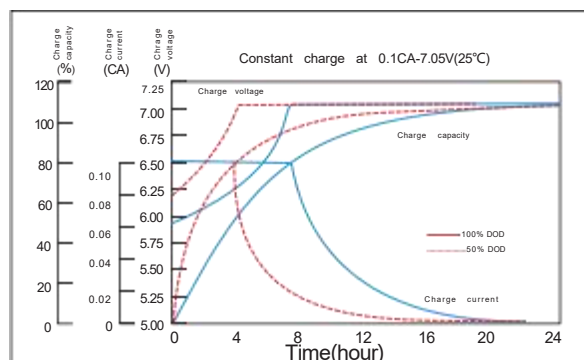

The effect of temperature on capacity

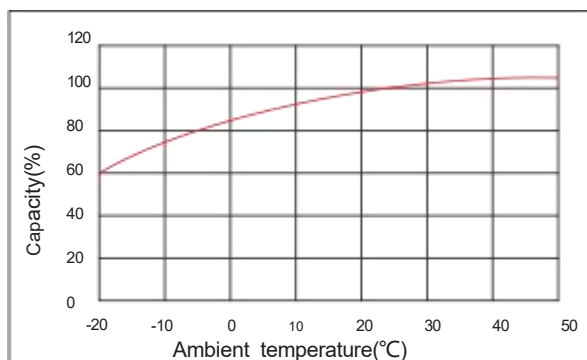

The effect of temperature on float life

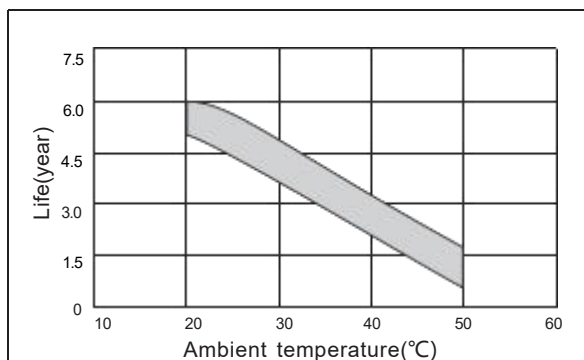

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	18.54	12.89	9.404	5.553	3.937	3.090	2.212	1.852	1.396	1.102	0.926	0.793	0.599	0.491	0.259
1.65V	17.51	12.15	8.895	5.276	3.752	2.946	2.136	1.793	1.353	1.072	0.902	0.776	0.593	0.485	0.255
1.70V	15.96	11.28	8.331	5.096	3.625	2.841	2.067	1.734	1.303	1.043	0.878	0.750	0.584	0.478	0.252
1.75V	14.44	10.55	8.034	4.870	3.451	2.737	1.982	1.674	1.277	1.016	0.856	0.728	0.576	0.473	0.225
1.80V	12.68	9.560	7.418	4.655	3.322	2.632	1.925	1.627	1.237	0.987	0.834	0.702	0.566	0.467	0.216
1.85V	10.07	7.768	6.156	4.009	2.898	2.361	1.779	1.479	1.144	0.918	0.778	0.668	0.531	0.438	0.212

Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)

FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	31.03	21.28	16.27	10.09	7.447	5.813	4.227	3.511	2.641	2.116	1.785	1.535	1.171	0.966	0.510
1.65V	29.36	20.62	15.78	9.785	7.076	5.660	4.162	3.415	2.579	2.066	1.745	1.483	1.160	0.955	0.503
1.70V	27.37	19.63	15.00	9.446	6.776	5.402	4.025	3.321	2.510	2.018	1.706	1.446	1.145	0.942	0.498
1.75V	25.32	18.86	14.68	9.122	6.647	5.286	3.875	3.220	2.470	1.973	1.668	1.414	1.131	0.931	0.494
1.80V	22.70	17.37	13.74	8.807	6.418	5.065	3.779	3.146	2.403	1.924	1.631	1.384	1.114	0.917	0.488
1.85V	18.40	14.45	11.57	7.660	5.699	4.606	3.478	2.874	2.231	1.795	1.526	1.319	1.049	0.868	0.460