




Electric vehicle battery expert 6-EVF-120H

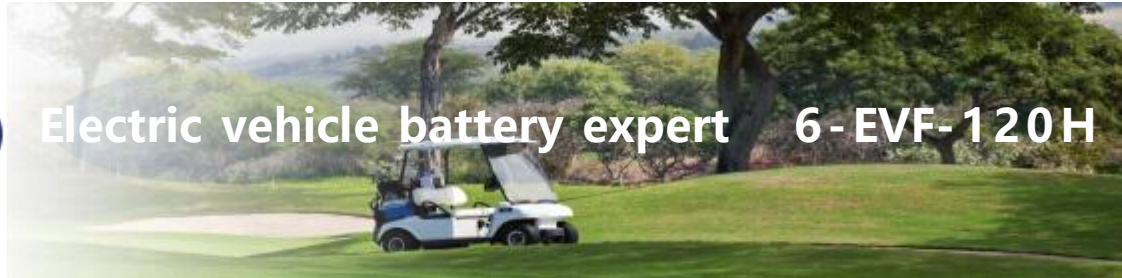


General Features

- High corrosion resistant performance: Pb-Ca multi-alloy grid
- High energy density and power density
- Optimized capability of instant high-current discharging
- Excellent charge acceptance ability
- Strong high and low temperature performance
- Low self-discharge rate



Dimension:406(L)×171(W) ×229(H)×240(TH)/(±3)

Unit: mm

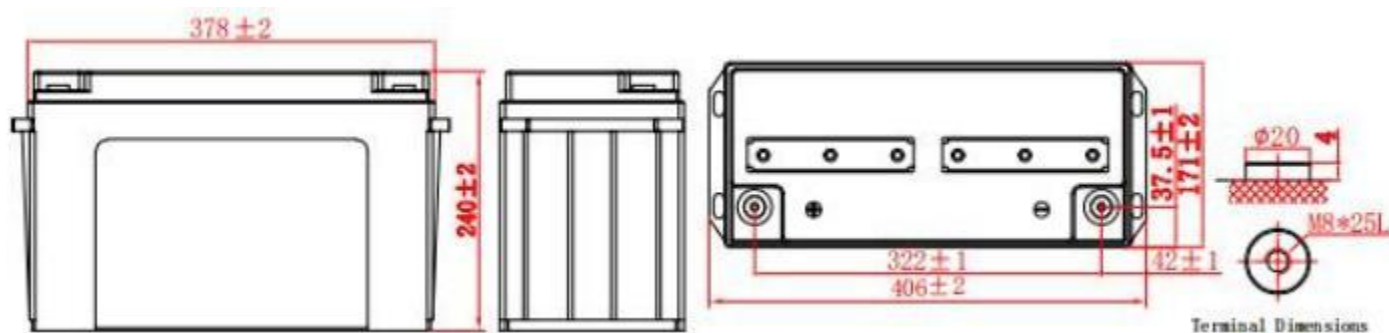

Specification

Nominal Voltage	12V
Nominal Capacity	120Ah@3Hour-rate to 1.75V per cell @25°C
Design life	5 years
Terminal	M8
Approx. Weight	Approx. 40.5kg±3% (89.29lbs±3%)
Container Material	ABS
Self discharge	3% of capacity declined per month at 25°C

Rated Capacity

20Hour Rate (7.5A to 10.5V)	150.0Ah
5Hour Rate (26.0A to 10.5V)	130.0Ah
3Hour Rate (40.0A to 10.5V)	120.0Ah

Operating Temperature

Discharge:	-20 ~50°C(-4~ 122°F)
Charge :	-20 ~50°C(-4~ 122°F)
Storage:	-20 ~50°C(-4~ 122°F)

Charge Method(25 °C)

Max charge current	18.0A
Float Use:	13.7-13.9V@25
Cycle Use :	14.7-14.9V,@25

Standards

Executive standard :GB/T32620-2016

Applications

- Electric vehicle
- Electric wheelchair
- Electric scooter
- Electric play car for children
- Garbage truck
- Patrol car


Attain Certificate




Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.




Discharge characteristic

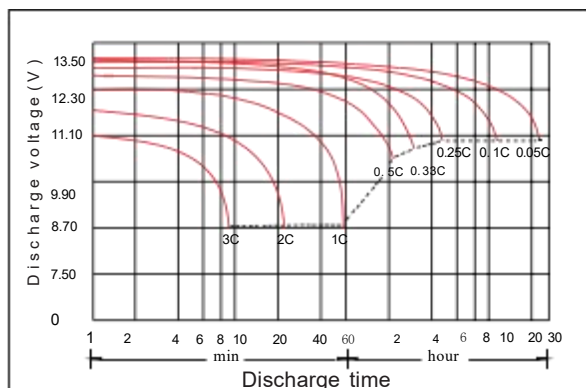


Charging characteristic

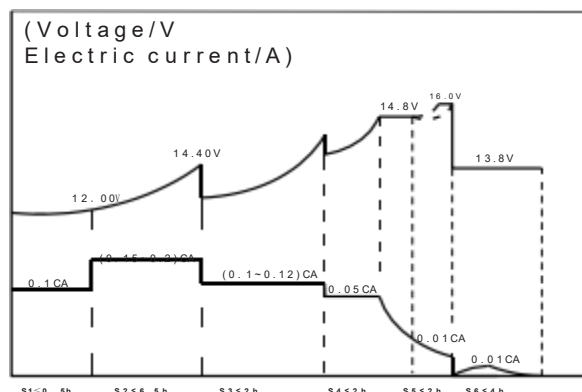

The effect of temperature on capacity

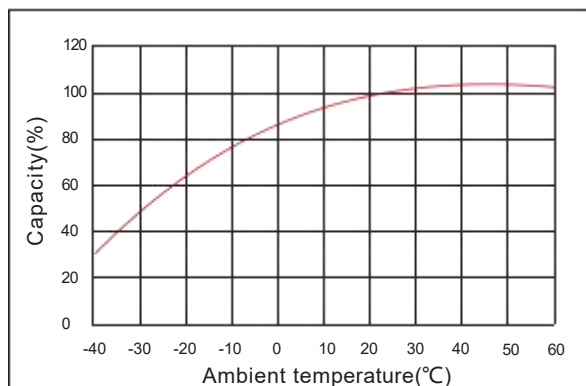

The effect of discharge depth on cycle life

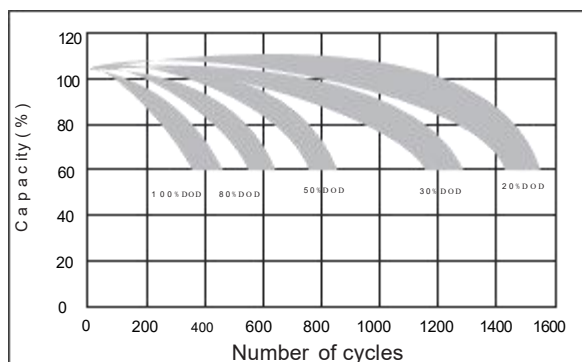

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

FV/Time	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	180	105	57.7	41.5	26.8	16.7	14.1	7.61
1.65V	177	104	57.3	41.2	26.6	16.6	14.0	7.58
1.70V	173	104	56.8	40.5	26.3	16.4	13.8	7.53
1.75V	172	102	56.0	40.0	26.0	16.3	13.7	7.50
1.80V	165	99.4	55.0	39.8	25.4	16.3	13.6	7.47
1.85V	150	92.1	52.2	37.5	24.1	15.5	13.2	7.33

Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)

FV/Time	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	326	199	109	79.0	50.9	32.6	27.1	15.1
1.65V	323	197	109	78.0	50.6	32.3	26.8	15.0
1.70V	323	196	108	77.5	50.3	32.1	26.5	14.9
1.75V	321	194	108	77.0	49.9	32.0	26.4	14.9
1.80V	312	192	107	76.9	49.3	31.7	26.1	14.8
1.85V	286	178	102	73.1	47.1	30.6	25.6	14.6