




Electric vehicle battery expert

6 - EVF- 60H

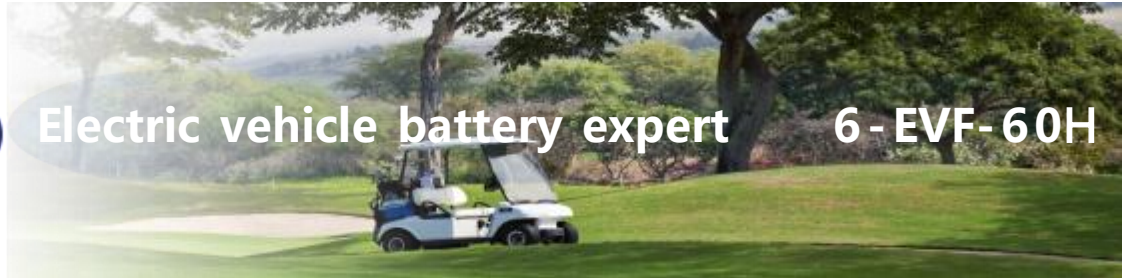


General Features

- High corrosion resistant performance: Pb-Ca multi-alloy grid
- High energy density and power density
- Optimized capability of instant high-current discharging
- Excellent charge acceptance ability
- Strong high and low temperature performance
- Low self-discharge rate



Dimension:223(L)×150(W) ×177(H)×177(TH)

Unit: mm

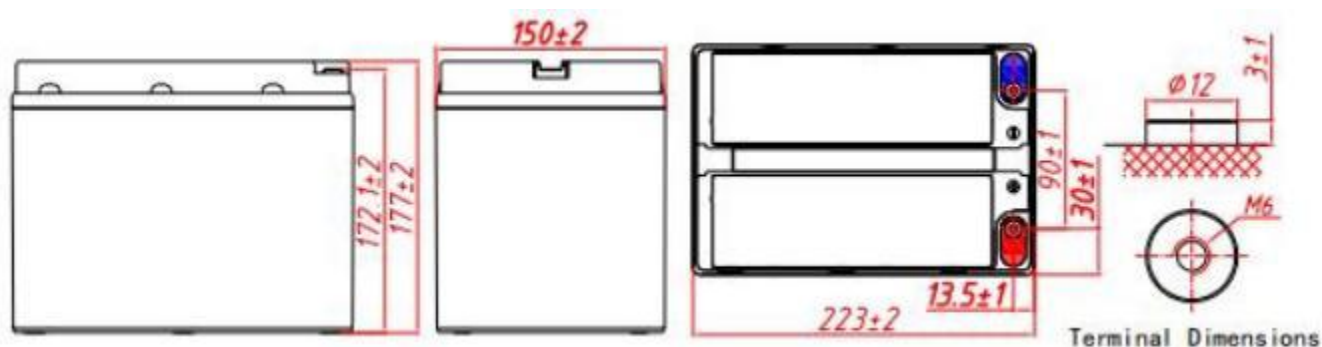

Specification

Nominal Voltage	12V
Nominal Capacity	60Ah @3hour-rate to 1.75V per cell@25℃
Design life	5 years
Terminal	M6
Approx. Weight	Approx. 16.35kg±3% (36.05lbs±3%)
Container Material	ABS
Self discharge	3% of capacity declined per month at 25℃

Rated Capacity

20Hour Rate (3.70A to 10.5V)	74.0Ah
5Hour Rate (13.2A to 10.5V)	66.0Ah
3Hour Rate (20.0A to 10.5V)	60.0Ah

Operating Temperature

Discharge:	-20 ~50℃(-4~ 122°F)
Charge :	-20 ~50℃(-4~ 122°F)
Storage:	-20 ~50℃(-4~ 122°F)

Charge Method(25 °C)

Max charge current	9.0A
Float Use:	13.7-13.9V@25
Cycle Use :	14.7-14.9V,@25

Standards

Executive standard :GB/T32620-2016

Applications

- Electric vehicle
- Electric wheelchair
- Electric scooter
- Electric play car for children
- Garbage truck
- Patrol car

Attain Certificate




Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.




Electric vehicle battery expert 6 - EVF-60H




Discharge characteristic

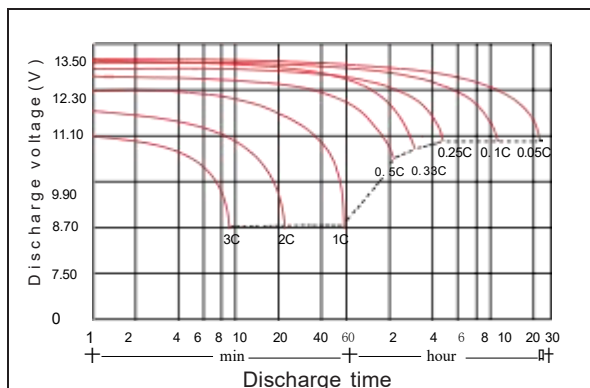


Charging characteristic

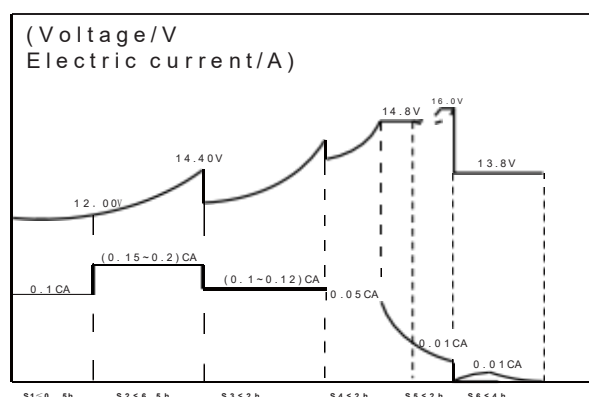

The effect of temperature on capacity

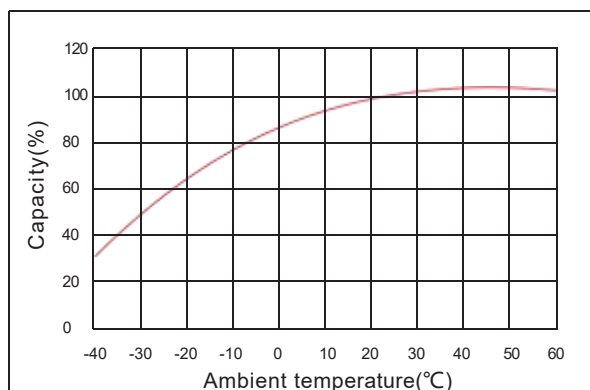

The effect of discharge depth on cycle life

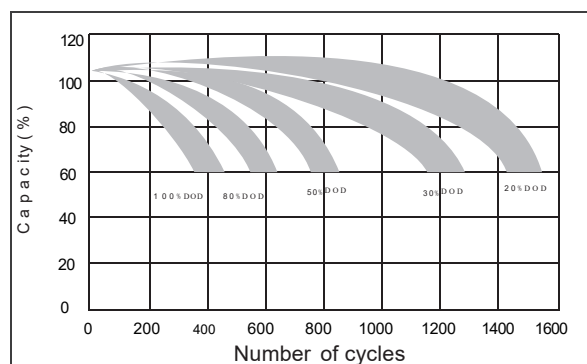

Constant Current Discharge Characteristics Unit: A (25 , 77)

FV/Time	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	79.7	51.4	30.40	20.79	13.60	8.79	7.41	3.75
1.65V	78.1	51.1	30.30	20.69	13.50	8.71	7.34	3.74
1.70V	76.6	50.8	29.90	20.20	13.30	8.63	7.27	3.71
1.75V	76.0	50.0	29.50	20.00	13.20	8.56	7.20	3.70
1.80V	72.7	48.7	29.00	19.90	12.90	8.56	7.13	3.69
1.85V	66.4	45.1	27.50	18.82	12.20	8.16	6.91	3.61

Constant Power Discharge Characteristics Unit: W/cell (25 , 77)

FV/Time	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	147.4	97.7	58.4	39.9	26.1	16.88	14.23	7.20
1.65V	144.5	97.1	58.2	39.7	25.9	16.72	14.09	7.18
1.70V	141.7	96.5	57.4	38.8	25.5	16.57	13.96	7.12
1.75V	140.6	95.0	56.6	38.4	25.3	16.44	13.82	7.10
1.80V	134.5	92.5	55.7	38.2	24.8	16.44	13.69	7.09
1.85V	122.8	85.7	52.8	36.1	23.4	15.67	13.27	6.94