



JH Series High-Rate Battery JH12-110W




General Features

- High corrosion resistant performance: Pb-Ca multi-alloy grid
- High energy density and power density
- Optimized capability of instant high-current discharging
- Excellent charge acceptance ability
- Excellent deep cycle discharge capability
- Strong high and low temperature performance
- Precision sealing technology
- Long life



Dimension:165(L)×125(W)×175(H)×175(TH)/(±3)

Unit: mm

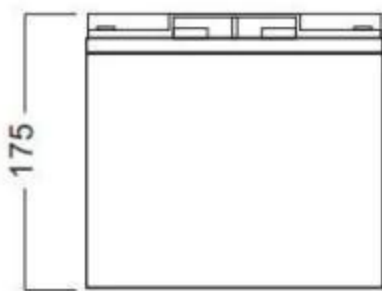

Specification

Nominal Voltage	12V
Nominal Capacity	1 10 W@ 1 5 min- rate to 1.6 7V percell@ 2 5 °C
Design life	5 years
Terminal	M6
Approx. Weight	Approx8.80kg±3% (19.4lbs±3%)
Container Material	ABS(UL94-HB, UL94-V0 Optional)
short-circuit current	1090A
Internal resistance(Full charged at 25°C:)	11.0 mΩ
Self discharge	3% of capacity declined per month at 25°C

Operating Temperature

Discharge:	-20 ~50°C(-4~ 122°F)
Charge :	-20 ~50°C(-4~ 122°F)
Storage:	-20 ~50°C(-4~ 122°F)

Charge Method (2 5 ° C)

Charge current:	Max.7.00A;Recom.2.80A
Float charge:13.5-13.8V	recom.13.8V(-18mV/ °C)
Equalize charge:13.8-14.1V	recom.14.1V(-24mV/ °C)
Cycle charge:14.4-15.0V	recom.14.7V(-30mV/ °C)

Standards

Executive standard: IEC 60896-21/22, GB/T 19638.1-2014, YD/T 3427-2018

Applications

- UPS/EPS
- Power systems
- Telecommunications system
- Emergency lighting, Auto control system
- Solar/wind generating storage cyclic
- Other general purpose

Rated Capacity


20Hour Rate (1.40A to 10.5V)	28.0Ah
3Hour Rate (7.45A to 10.2V)	22.35Ah
1Hour Rate (20.4A to 9.6V)	20.4Ah

Attain Certificate




Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.


Discharge characteristic

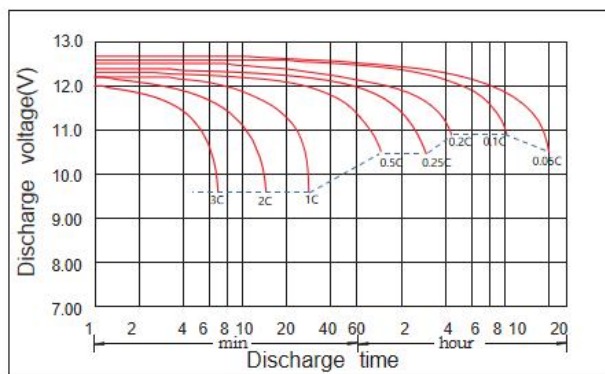


Charging characteristic

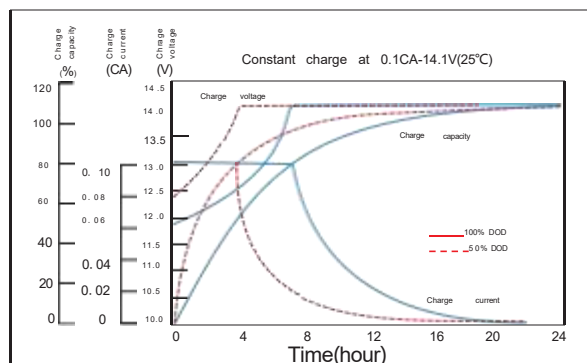

The effect of temperature on capacity

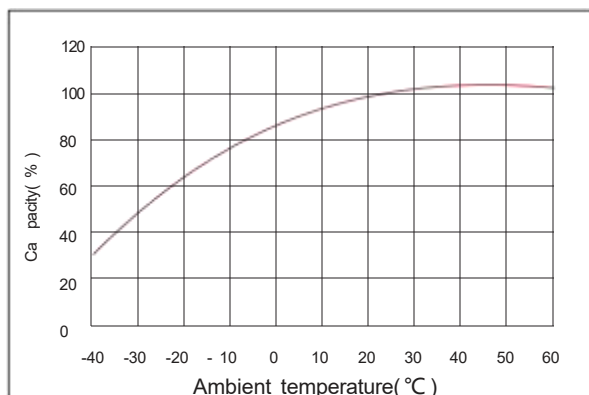

The effect of discharge depth on cycle life

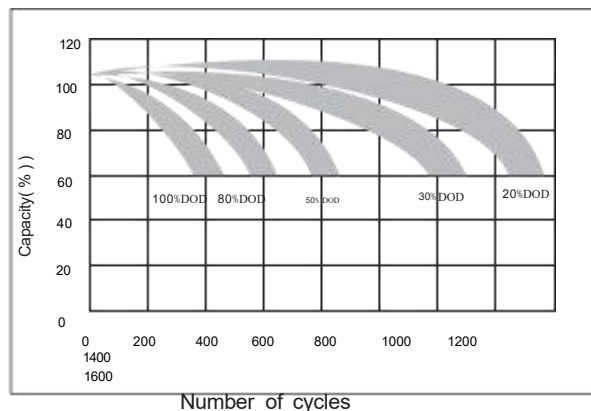

Constant Current Discharge Characteristics Unit:A (25°C,77°F)

FV/Time	2min	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	153	124	87.7	63.6	35.7	24.7	20.4	14.5	10.7	7.8	6.25	5.09	4.23	3.44	2.8	1.5
1.65V	134	101	77.4	59.5	34	23.5	19.1	13.9	10.3	7.59	5.87	4.94	4.14	3.36	2.77	1.46
1.70V	126	95	72.8	57.6	33.1	22.8	18.6	13.4	10.1	7.45	5.74	4.81	4.05	3.22	2.71	1.44
1.75V	110	86	66	54.4	31.7	22.2	18.1	13.1	9.9	7.33	5.65	4.71	3.98	3.17	2.66	1.4
1.80V	103	79	59.6	51.6	30.3	21.3	17.4	12.7	9.56	6.92	5.54	4.61	3.81	3.07	2.6	1.36

Constant Power Discharge Characteristics Unit: W/cell (25°C,77°F)

FV/Time	2min	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	268	202	142.5	116.4	66	45.2	37.5	26.9	20.1	14.5	11.63	9.67	7.81	6.5	5.33	2.91
1.65V	235	177	131.3	110	63.5	44	36.1	26	19.4	14.13	11.25	9.19	7.92	6.4	5.23	2.84
1.70V	221	166	125	107.8	62	42.7	35	24.6	18.5	13.88	10.69	9.01	7.61	6.23	5.19	2.81
1.75V	180	150	117	102.6	60	41.9	34.5	24.3	18.25	13.38	10.55	8.94	7.43	6.08	5.06	2.75
1.80V	180	138	112.4	98.1	58.1	40.3	32.9	23.8	18	13.25	10.46	8.78	7.28	5.88	4.96	2.74