



JH Series High-Rate Battery JH12-24W


General Features

- ▶ High corrosion resistant performance: Pb-Ca multi-alloy grid
- ▶ High energy density and power density
- ▶ Optimized capability of instant high-current discharging
- ▶ Excellent charge acceptance ability
- ▶ Excellent deep cycle discharge capability
- ▶ Strong high and low temperature performance
- ▶ Precision sealing technology
- ▶ Long life



Dimension: 90(L)×70(W)×101(H)×106(TH) /(±3)

Unit: mm

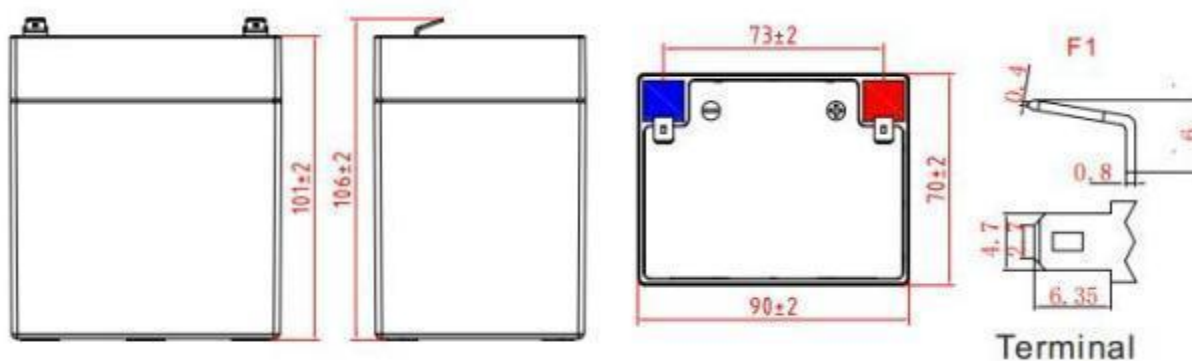

Specification

Nominal Voltage	12V
Nominal Capacity	24W@ 15min-rate to 1.67V per cell @25°C
Design life	5 years
Terminal	F1/F2
Approx. Weight	Approx1.68kg±3% (3.70lbs ±3%)
Container Material	ABS(UL94-HB, UL94-V0 Optional)
short-circuit current	522A
Internal resistance(Full charged at 25°C:)	23.0 mΩ
Self discharge	3% of capacity declined per month at 25°C

Operating Temperature

Discharge:	-20 ~50°C(-4~ 122°F)
Charge :	-20 ~50°C(-4~ 122°F)
Storage:	-20 ~50°C(-4~ 122°F)

Charge Method (2 5° C)

Charge current:	Max. 1.38A;Recom.0.55A
Float charge:13.5-13.8V	recom.13.8V(-18mV/ °C)
Equalize charge:13.8-14.1V	recom.14.1V(-24mV/ °C)
Cycle charge:14.4-15.0V	recom.14.7V(-30mV/ °C)

Standards

Executive standard: IEC 60896-21/22, GB/T 19638.1-2014, YD/T 3427-2018

Applications

- ▶ UPS/EPS
- ▶ Power systems
- ▶ Telecommunications system
- ▶ Emergency lighting、Auto control system
- ▶ Solar/wind generating storage cyclic
- ▶ Other general purpose

Rated Capacity

20Hour Rate (0.275A to 10.5V)	5.50Ah
3Hour Rate (1.46A to 10.2V)	4.38Ah
1Hour Rate (4.00A to 9.6V)	4.00Ah

Attain Certificate




Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.




JH Series High-Rate Battery JH12-24W


Discharge characteristic

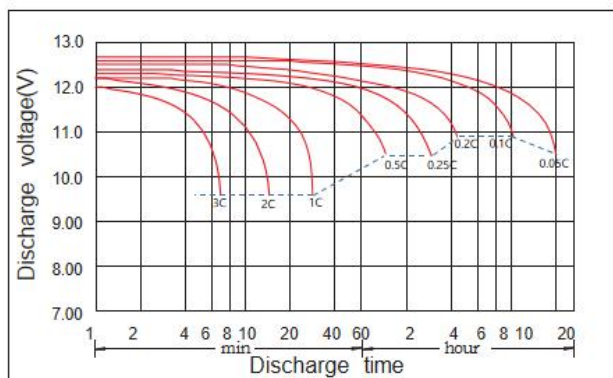


Charging characteristic

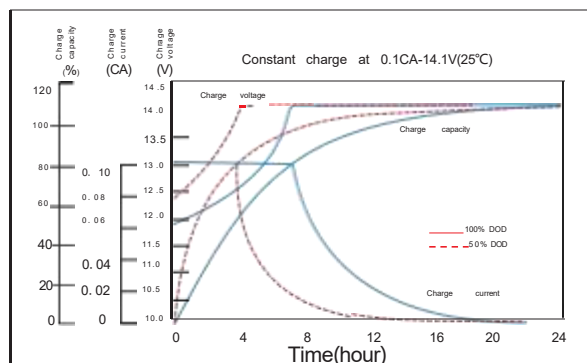

The effect of temperature on capacity

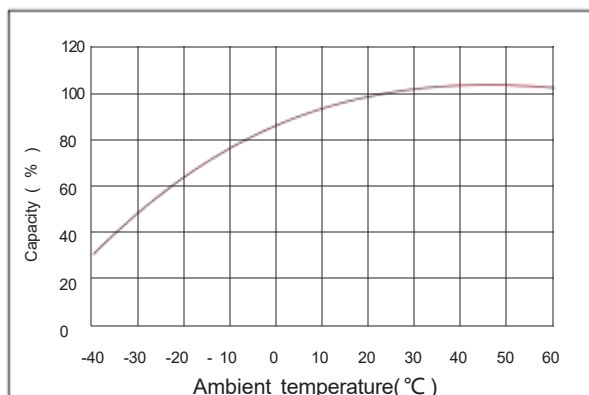

The effect of discharge depth on cycle life

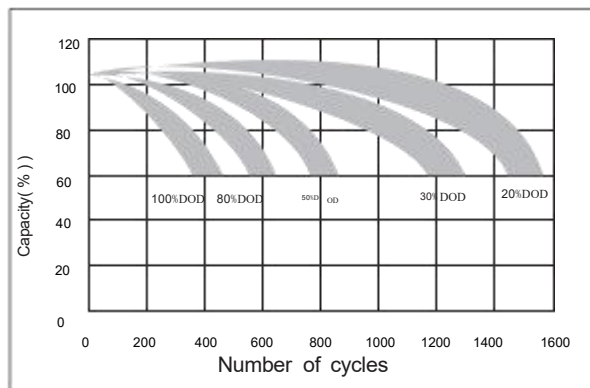

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

FV/Time	2min	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	44.1	27.4	17.8	12.8	7.13	4.88	4	2.85	2.1	1.53	1.23	1	0.83	0.68	0.55	0.295
1.65V	42.5	26.5	15.7	11.9	6.78	4.65	3.75	2.73	2.02	1.49	1.15	0.97	0.81	0.66	0.55	0.288
1.70V	41.3	25.9	14.8	11.6	6.6	4.5	3.65	2.63	1.98	1.46	1.13	0.95	0.8	0.63	0.53	0.283
1.75V	40.5	25.4	13.4	10.9	6.33	4.37	3.55	2.58	1.95	1.44	1.11	0.93	0.78	0.62	0.52	0.275
1.80V	36.0	22.0	12.1	10.4	6.05	4.2	3.43	2.5	1.88	1.36	1.09	0.91	0.75	0.6	0.51	0.268

Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)

FV/Time	2min	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	88.0	54.8	31.1	25.4	14.4	9.87	8.18	5.86	4.39	3.16	2.54	2.11	1.7	1.42	1.16	0.64
1.65V	85.0	53.0	28.6	24	13.9	9.6	7.88	5.67	4.23	3.08	2.45	2.01	1.73	1.4	1.14	0.62
1.70V	82.6	51.8	27.3	23.5	13.5	9.32	7.63	5.37	4.04	3.03	2.33	1.97	1.66	1.36	1.13	0.61
1.75V	81.0	51.0	25.5	22.4	13.1	9.13	7.53	5.29	3.98	2.92	2.3	1.95	1.62	1.33	1.1	0.6
1.80V	72.0	44.0	24.5	21.4	12.7	8.79	7.17	5.19	3.93	2.89	2.28	1.91	1.59	1.28	1.08	0.6