



JM Series lead-acid battery JM12-55(A)




General Features

- ▶High corrosion resistant performance: Pb-Ca multi-alloy grid
- ▶High energy density and power density
- ▶Optimized capability of instant high-current discharging
- ▶Excellent charge acceptance ability
- ▶Excellent deep cycle discharge capability
- ▶Strong high and low temperature performance
- ▶Precision sealing technology
- ▶Long life



Dimension:229(L)×138(W) ×205(H)×208(TH)/(±3)

Unit: mm

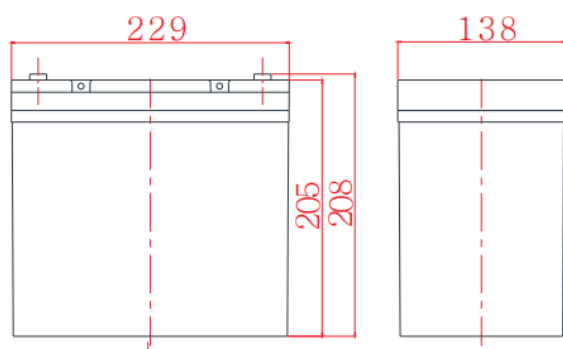

Terminal Dimensions

Specification

Nominal Voltage	12V
Nominal Capacity	55Ah@10hour-rate to 1.80V per cell @25°C
Design life	10 years
Terminal	M6
Approx. Weight	Approx17.5kg±3% (38.6±3%lbs)
Container Material	ABS(UL94-HB, UL94-V0 Optional)
short-circuit current	1600A
Internal resistance(Full charged at 25°C:)	7.5 mΩ
Self discharge	3% of capacity declined per month at 25°C

Operating Temperature

Discharge:	-20 ~50°C(-4~ 122°F)
Charge :	-20 ~50°C(-4~ 122°F)
Storage:	-20 ~50°C(-4~ 122°F)

Charge Method(25 °C)

Charge current:	Max. 13.8A;Recom.5.5A
Float charge:13.5-13.8V	recom.13.8V(-18mV/ °C)
Equalize charge:13.8-14.1V	recom.14.1V(-24mV/ °C)
Cycle charge:14.4-15.0V	recom.14.7V(-30mV/ °C)

Standards

Executive standard: IEC 60896-21/22,
GB/T 19638.1-2014

Applications

- ▶UPS/EPS
- ▶Power systems
- ▶Telecommunications system
- ▶Emergency lighting, Auto control system
- ▶Solar/wind generating storage cyclic
- ▶Other general purpose

Rated Capacity

10Hour Rate (5.50A to 10.8V)	55.0Ah
3Hour Rate (14.6A to 10.2V)	43.8Ah
1Hour Rate (34.8A to 9.6V)	34.8Ah

Attain Certificate


			RoHS

Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.




JM Series lead-acid battery JM12-55(A)


Discharge characteristic

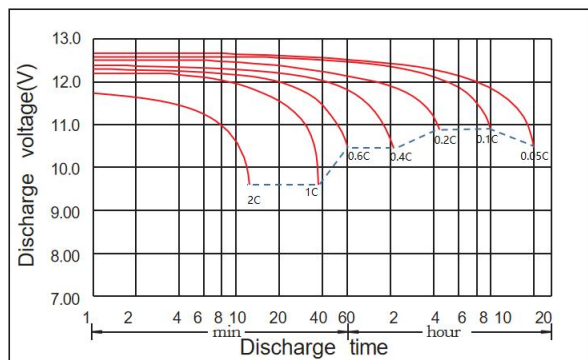


Charging characteristic

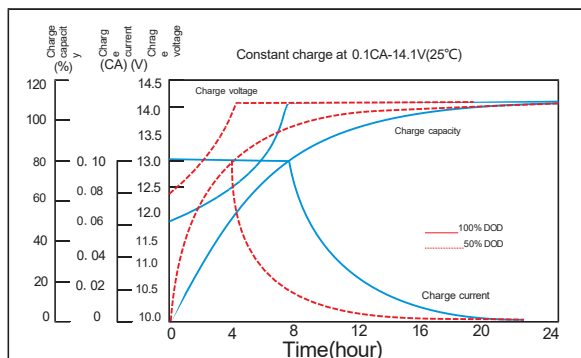

The effect of temperature on capacity

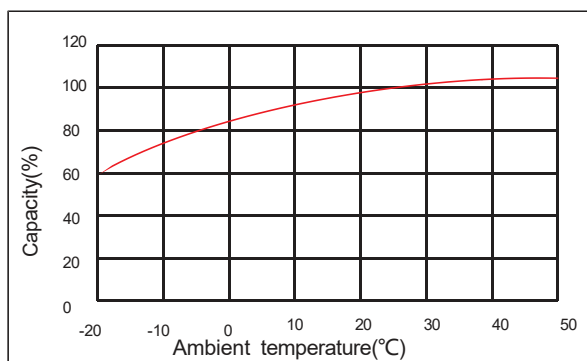

The effect of temperature on float life

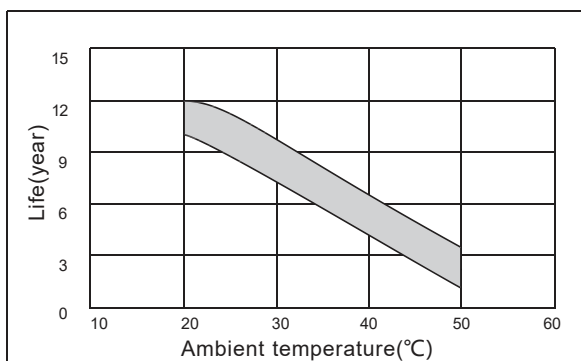

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

FV/Time	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	101.5	60.2	44.1	34.8	25.8	20.6	15.5	12.5	10.6	9.04	6.97	5.80	3.04
1.65V	97.5	57.8	42.3	33.4	25.1	20.2	15.0	12.1	10.4	8.91	6.90	5.73	2.99
1.70V	91.3	55.3	40.5	32.0	24.1	19.3	14.6	11.8	10.1	8.72	6.79	5.65	2.96
1.75V	85.0	52.3	38.7	31.0	23.1	18.6	14.2	11.5	9.84	8.50	6.69	5.57	2.94
1.80V	80.0	50.9	37.3	29.7	22.0	18.1	14.0	11.2	9.58	8.25	6.58	5.50	2.91
1.85V	66.4	43.1	32.5	26.1	19.9	16.0	12.3	10.2	8.72	7.52	6.18	5.07	2.79

Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)

FV/Time	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	178.3	109.4	80.2	63.7	47.8	37.9	29.3	23.4	20.0	17.4	13.6	11.4	5.98
1.65V	173.0	106.1	77.7	61.9	46.6	37.3	28.8	22.9	19.6	17.2	13.5	11.3	5.89
1.70V	164.4	102.5	76.7	60.3	46.0	36.1	27.6	22.3	19.1	16.8	13.3	11.1	5.83
1.75V	155.2	98.9	73.6	59.0	44.7	35.1	27.5	21.8	18.7	16.5	13.2	11.0	5.80
1.80V	146.8	95.5	70.8	56.5	42.4	34.6	26.7	21.6	18.3	16.2	13.0	10.9	5.77
1.85V	122.3	83.1	62.9	50.5	39.4	31.6	24.0	19.9	17.1	14.8	12.2	10.2	5.43