



JS Series lead-acid battery JS12-22(L)






General Features

- High corrosion resistant performance: Pb-Ca multi-alloy grid
- High energy density and power density
- Optimized capability of instant high-current discharging
- Excellent charge acceptance ability
- Excellent deep cycle discharge capability
- Strong high and low temperature performance
- Precision sealing technology



Dimension:181(L)×76(W) ×167(H)×167(TH)/(±2.0)

Unit: mm

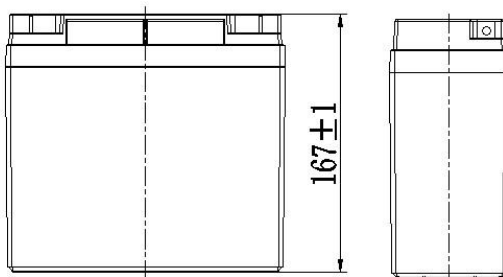

Specification	
Nominal Voltage	12V
Nominal Capacity	22.0Ah@20hour-rate to 1.75V per cell @25°C
Design life	5 years
Terminal	L1
Approx. Weight	Approx5.80kg±3% (12.8lbs±3%)
Container Material	ABS(UL94-HB, UL94-V0 Optional)
short-circuit current	882A
Internal resistance(Full charged at 25°C:)	13.6 mΩ
Self discharge	3% of capacity declined per month at 25°C
Operating Temperature	
Discharge:	-20 ~50°C(-4~ 122°F)
Charge :	-20 ~50°C(-4~ 122°F)
Storage:	-20 ~50°C(-4~ 122°F)
Charge Method(25 °C)	
Charge current:	Max. 5.50A;Recom.2.20A
Float charge:13.5-13.8V	recom.13.8V(-18mV/ °C)
Equalize charge:13.8-14.1V	recom.14.1V(-24mV/ °C)
Cycle charge:14.4-15.0V	recom.14.7V(-30mV/ °C)

Standards

Executive standard: IEC 61056-2,
GB/T 19639.1-2014

Applications

- UPS/EPS
- Power systems
- Telecommunications system
- Emergency lighting、Auto control system
- Solar/wind generating storage cyclic
- Other general purpose

Rated Capacity

20Hour Rate (1.10A to 10.5V)	22.0Ah
3Hour Rate (5.732A to 10.2V)	17.196Ah
1Hour Rate (13.60A to 9.6V)	13.60Ah

Attain Certificate


	RoHS

Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.




JS Series lead-acid battery JS12-22(L)


Discharge characteristic

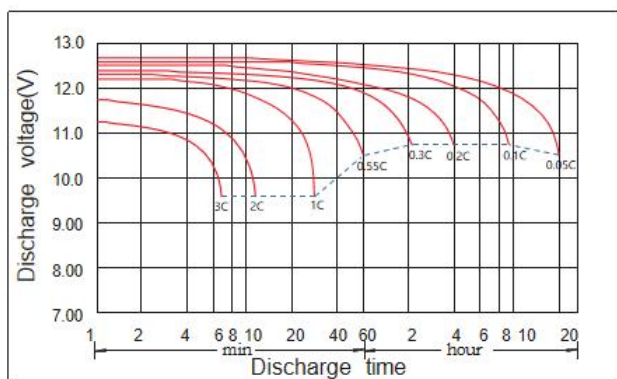


Charging characteristic

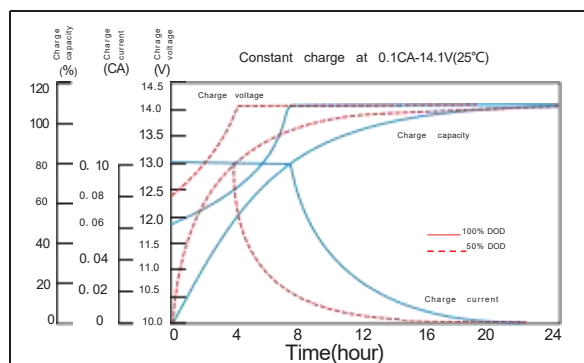

The effect of temperature on capacity

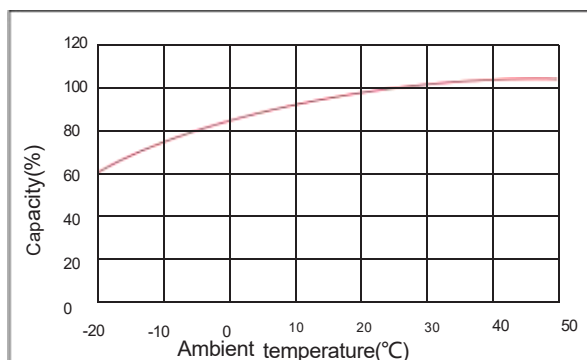

The effect of temperature on float life

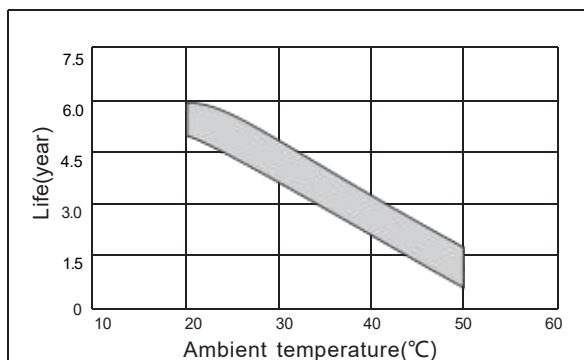

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	81.57	56.73	41.38	24.43	17.32	13.60	9.734	8.151	6.141	4.849	4.074	3.487	2.638	2.162	1.140
1.65V	77.04	53.48	39.14	23.22	16.51	12.96	9.400	7.891	5.952	4.718	3.968	3.414	2.608	2.135	1.122
1.70V	70.22	49.62	36.66	22.42	15.95	12.50	9.095	7.630	5.732	4.589	3.865	3.302	2.568	2.103	1.109
1.75V	63.54	46.42	35.35	21.43	15.18	12.04	8.719	7.364	5.617	4.472	3.768	3.203	2.532	2.080	1.100
1.80V	55.79	42.06	32.64	20.48	14.62	11.58	8.470	7.159	5.443	4.343	3.671	3.089	2.489	2.055	1.084
1.85V	44.29	34.18	27.09	17.64	12.75	10.39	7.827	6.506	5.032	4.037	3.423	2.939	2.337	1.929	1.021

Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)

FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	136.5	93.62	71.57	44.38	32.77	25.58	18.60	15.45	11.62	9.309	7.853	6.754	5.151	4.249	2.245
1.65V	129.2	90.71	69.44	43.05	31.13	24.90	18.31	15.03	11.35	9.091	7.678	6.526	5.104	4.204	2.213
1.70V	120.4	86.38	66.01	41.56	29.81	23.77	17.71	14.61	11.04	8.877	7.504	6.362	5.037	4.146	2.190
1.75V	111.4	82.98	64.58	40.14	29.24	23.26	17.05	14.17	10.87	8.683	7.341	6.221	4.977	4.096	2.174
1.80V	99.90	76.42	60.47	38.75	28.24	22.29	16.63	13.84	10.57	8.464	7.177	6.088	4.903	4.036	2.146
1.85V	80.96	63.57	50.89	33.70	25.08	20.27	15.30	12.65	9.818	7.897	6.715	5.805	4.614	3.817	2.023