




- ▶ High corrosion resistant performance: Pb-Ca multi-alloy grid
- ▶ Excellent charge acceptance ability
- ▶ Excellent deep cycle discharge capability
- ▶ Strong high and low temperature performance
- ▶ Precision sealing technology
- ▶ Long life



Technical drawings of the device showing front and side views with dimensions:

- Front View (Left):** Shows a rectangular device with a width of 330 ± 3 mm and a height of 353 ± 3 mm. A small rectangular feature is visible at the top center.
- Side View (Right):** Shows the side profile of the device with a height of 365 ± 3 mm. A small rectangular feature is visible at the top.

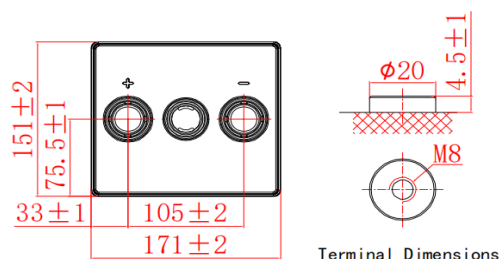

Nominal Voltage	2V
Nominal Capacity	300Ah@10Hour-rate to 1.80V @25℃
Design life	15 years
Terminal	M8
Approx. Weight	Approx17.7kg±3% (39.0lbs±3%)
Container Material	ABS
short-circuit current	2666A
Internal resistance(Full charged at 25℃:)	0.75 mΩ
Self discharge	3% of capacity declined per month at 25℃

Discharge:	-20 ~50°C(-4~ 122°F)
Charge :	-20 ~50°C(-4~ 122°F)
Storage:	-20 ~50°C(-4~ 122°F)

Charge current:	Max. 60.0A;Recom.30.0A
Float charge:2.23-2.27V	recom.2.25V(-3mV/ °C)
Equalize charge:2.30-2.35V	recom.2.35V(-4mV/ °C)
Cycle charge:2.40-2.50V	recom.2.40V(-5mV/ °C)


Executive standard YD/T 799-2010

- ▶ UPS/EPS
- ▶ Power systems
- ▶ Telecommunications system
- ▶ Auto control system
- ▶ Solar/wind generating storage cyclic
- ▶ Other general purpose


10Hour Rate (30.0A to 1.80V)	300.0Ah
3Hour Rate (75.0A to 1.80V)	225.0Ah
1Hour Rate (165A to 1.75V)	165.0Ah

Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.


Discharge characteristic

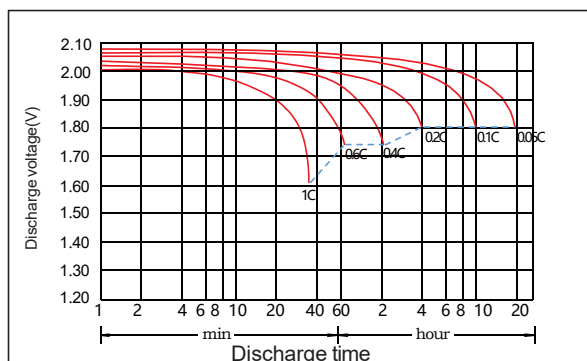


Charging characteristic

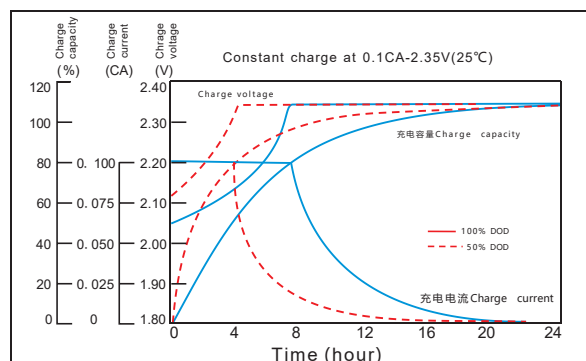

The effect of temperature on capacity

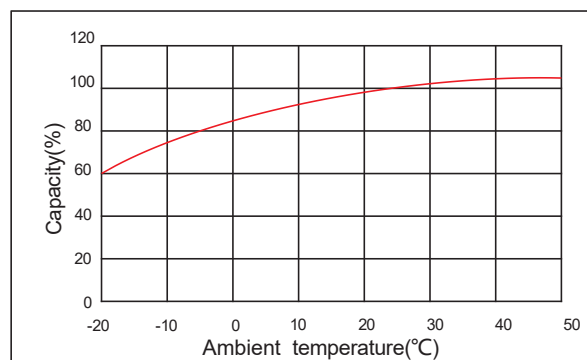

The effect of temperature on float life

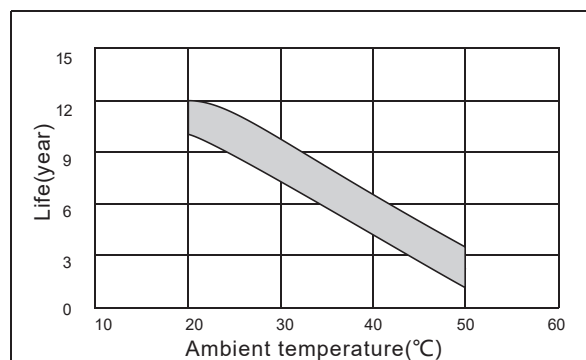

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

FV/Time	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	375	245	209	173	133	118	84.4	63.4	58.2	46.9	39.5	32.5	16.7
1.67V	350	230	200	170	131	115	82.2	62.8	56.8	46.4	38.9	32.2	16.5
1.70V	324	216	191	167	129	111	79.9	61.8	56.3	45.7	38.3	31.7	16.3
1.75V	297	201	183	165	127	107	77.4	60.8	54.7	45	37.9	31.2	16
1.80V	277	188	175	161	123	101	75	58.5	53.4	43.3	37.1	30	15.4
1.85V	243	167	156	145	121	94.2	71.2	57.9	51.6	42.8	36.1	29.7	15

Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)

FV/Time	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	661	448	386	325	250	221	159	121	111	89.6	75.8	63.1	32.7
1.67V	624	421	370	320	246	216	155	119	109	88.6	74.7	62.5	32.3
1.70V	582	395	354	313	243	209	150	117	107	87.3	73.5	61.6	31.9
1.75V	543	368	339	310	238	202	146	115	104	86	72.8	60.5	31.5
1.80V	512	346	324	303	231	190	141	112	101	82.7	71.2	58.3	30.4
1.85V	454	310	292	275	228	177	134	109	98	81.7	69.3	57.9	30.1