




JL Series lead-acid battery JL2-400B

General Features

- High corrosion resistant performance: Pb-Ca multi-alloy grid
- Excellent charge acceptance ability
- Excellent deep cycle discharge capability
- Strong high and low temperature performance
- Precision sealing technology
- Long life



Dimension:211(L)×175(W) ×329(H)×367(TH)/(±3) Unit: mm

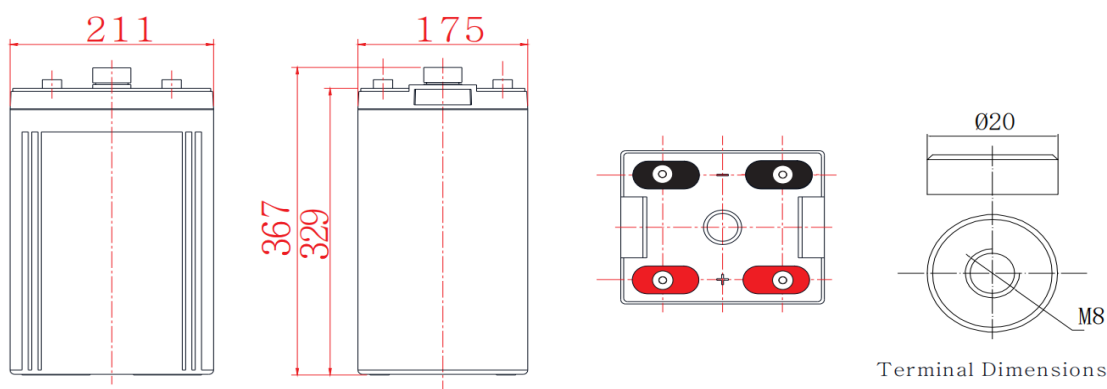

Specification

Nominal Voltage	2V
Nominal Capacity	400Ah@10Hour-rate to 1.80V @25°C
Design life	12 years
Terminal	M8
Approx. Weight	Approx25.2kg±3% (55.6lbs±3%)
Container Material	ABS
short-circuit current	2777A
Internal resistance(Full charged at 25°C:)	0.72 mΩ
Self discharge	3% of capacity declined per month at 25°C

Operating Temperature

Discharge:	-20 ~50°C(-4~ 122°F)
Charge :	-20 ~50°C(-4~ 122°F)
Storage:	-20 ~50°C(-4~ 122°F)

Charge Method(25 °C)

Charge current:	Max. 80.0A;Recom.40.0A
Float charge:2.23-2.27V	recom.2.25V(-3mV/ °C)
Equalize charge:2.30-2.35V	recom.2.35V(-4mV/ °C)
Cycle charge:2.40-2.50V	recom.2.40V(-5mV/ °C)

Standards

Executive standard YD/T 799-2010

Applications

- UPS/EPS
- Power systems
- Telecommunications system
- Auto control system
- Solar/wind generating storage cyclic
- Other general purpose

Rated Capacity

10Hour Rate (40.0A to 1.80V)	400.0Ah
3Hour Rate (100.0A to 1.80V)	300.0Ah
1Hour Rate (220A to 1.75V)	220.0Ah

Attain Certificate


			RoHS

Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.




JL Series lead-acid battery JL2-400B


Discharge characteristic

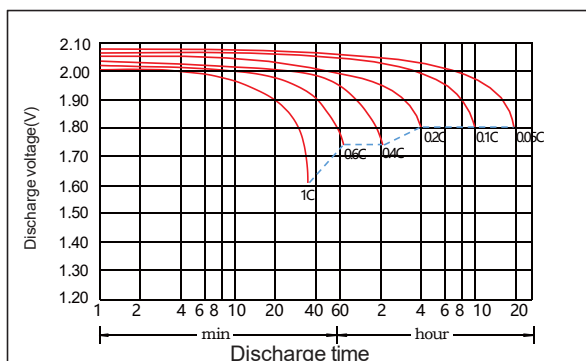


Charging characteristic

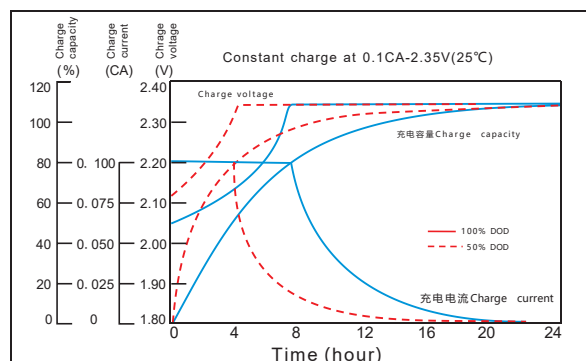

The effect of temperature on capacity

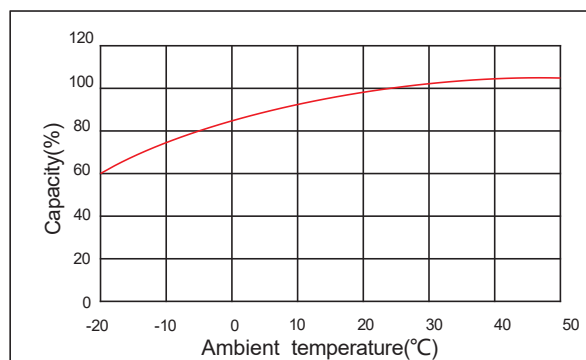

The effect of temperature on float life

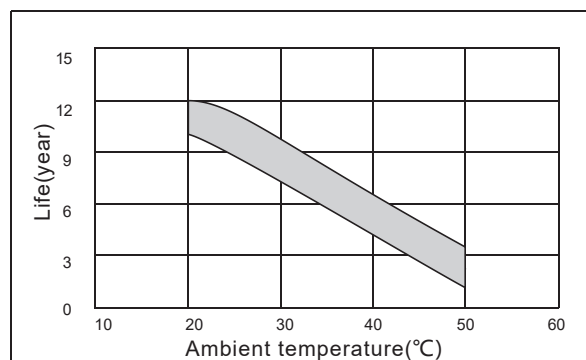

Constant Current Discharge Characteristics Unit:A (25°C,77°F)

FV/Time	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	500	327	279	231	177	157	112	84.5	77.6	62.5	52.7	43.3	22.2
1.67V	467	307	267	227	175	153	110	83.7	75.7	61.9	51.9	42.9	22
1.70V	432	288	255	222	172	148	107	82.4	75.1	60.9	51.1	42.3	21.7
1.75V	395	268	244	220	169	143	103	81.1	72.9	60	50.5	41.6	21.3
1.80V	369	251	233	215	164	135	100	78	71.2	57.7	49.5	40	20.6
1.85V	324	223	208	194	161	126	94.9	77.2	68.8	57.1	48.1	39.6	20.1

Constant Power Discharge Characteristics Unit: W/cell (25°C ,77°F)

FV/Time	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	882	598	515	433	333	295	211	161	147	119	101	84.1	43.6
1.67V	832	562	493	426	328	288	206	159	145	118	99.6	83.3	43.1
1.70V	775	527	472	417	323	278	200	156	143	116	98	82.2	42.6
1.75V	724	491	452	414	318	269	194	153	139	115	97	80.6	42
1.80V	682	462	432	404	308	253	188	150	135	110	95	77.8	40.5
1.85V	606	413	389	366	304	236	178	145	131	109	92.4	77.2	40.1