




JL Series lead-acid battery JL2-500C

General Features

- High corrosion resistant performance: Pb-Ca multi-alloy grid
- Excellent charge acceptance ability
- Excellent deep cycle discharge capability
- Strong high and low temperature performance
- Precision sealing technology
- Long life



Dimension:241(L)×172(W) ×330(H)×343(TH)/(±3) Unit: mm

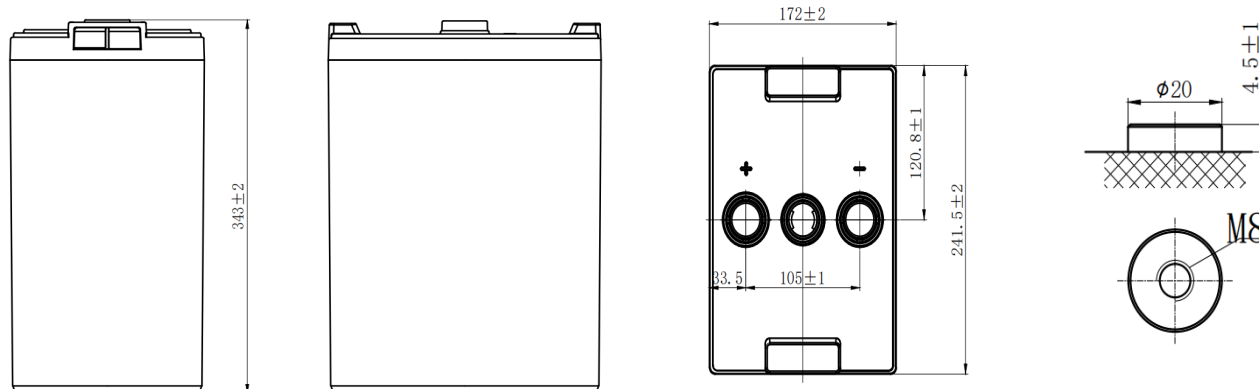

Specification

Nominal Voltage	2V
Nominal Capacity	500Ah@10Hour-rate to 1.75V @25°C
Design life	15 years
Terminal	M8
Approx. Weight	Approx27.7kg±3%(61.1lbs±3%)
Container Material	ABS
short-circuit current	2857A
Internal resistance(Full charged at 25°C:)	0.60 mΩ
Self discharge	3% of capacity declined per month at 25°C

Operating Temperature

Discharge:	-20 ~50°C(-4~ 122°F)
Charge :	-20 ~50°C(-4~ 122°F)
Storage:	-20 ~50°C(-4~ 122°F)

Charge Method(25 °C)

Charge current:	Max. 100.0A;Recom.50.0A
Float charge:2.23-2.27V	recom.2.25V(-3mV/ °C)
Equalize charge:2.30-2.35V	recom.2.35V(-4mV/ °C)
Cycle charge:2.40-2.50V	recom.2.40V(-5mV/ °C)

Standards

Executive standard YD/T 799-2010

Applications

- UPS/EPS
- Power systems
- Telecommunications system
- Auto control system
- Solar/wind generating storage cyclic
- Other general purpose

Rated Capacity

10Hour Rate (50.0A to 1.80V)	500.0Ah
3Hour Rate (125.0A to 1.80V)	375.0Ah
1Hour Rate (275A to 1.75V)	275.0Ah

Attain Certificate


ISO 9001 CGM	ISO 14001 CGM	OHSAS 18001 CGM	RoHS
UL	CE	FC	PS E

Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.




JL Series lead-acid battery JL2-500C


Discharge characteristic

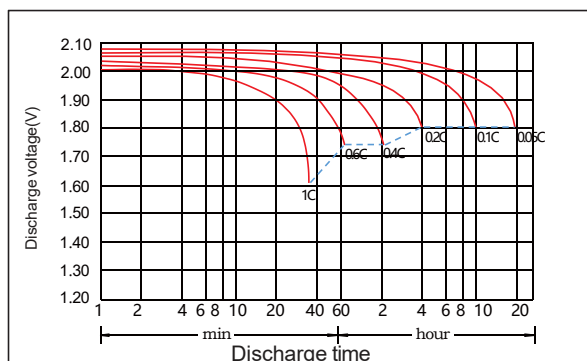


Charging characteristic

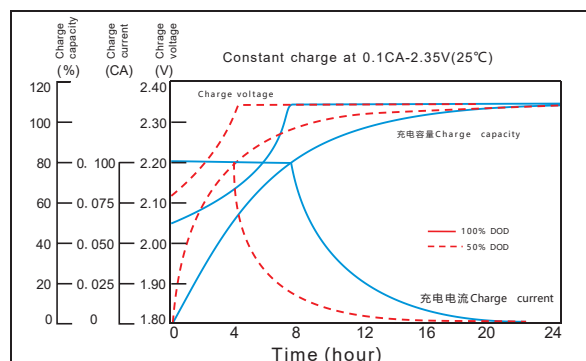

The effect of temperature on capacity

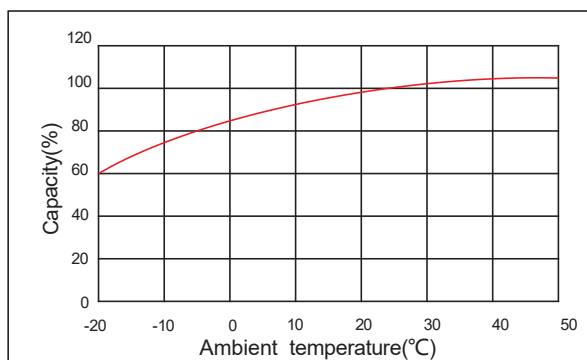

The effect of temperature on float life

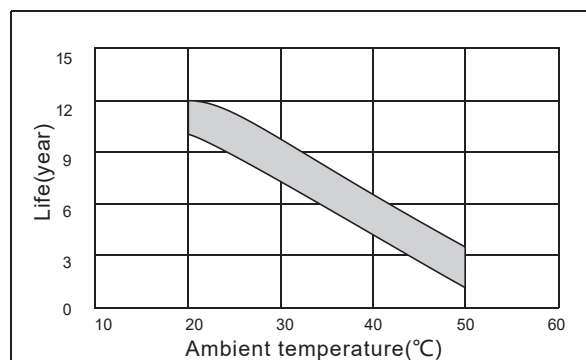

Constant Current Discharge Characteristics Unit:A (25,77)

FV/Time	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	625	408	348	288	222	197	141	106	97	78.2	65.8	54.2	27.8
1.67V	583	384	333	283	218	192	137	105	94.7	77.3	64.8	53.7	27.5
1.70V	540	360	318	278	215	185	133	103	93.8	76.2	63.8	52.8	27.1
1.75V	494	335	305	275	212	178	129	101	91.2	75	63.2	52	26.7
1.80V	461	314	292	269	205	168	125	97.5	89	72.2	61.8	50	25.7
1.85V	405	279	260	242	202	157	119	96.5	86	71.3	60.2	49.5	25.1

Constant Power Discharge Characteristics Unit: W/cell (25 ,77)

FV/Time	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	1102	747	643	541	416	369	264	202	184	149	126	105	54.5
1.67V	1040	702	617	533	410	360	258	199	182	148	124	104	53.8
1.70V	969	658	590	522	404	348	250	195	178	145	123	103	53.2
1.75V	905	614	565	517	397	336	243	192	173	143	121	101	52.5
1.80V	853	577	540	505	385	316	235	187	169	138	119	97.2	50.6
1.85V	757	516	487	458	380	295	223	182	163	136	116	96.5	50.1