




General Features

- ▶ High corrosion resistant performance: Pb-Ca multi-alloy grid
- ▶ High energy density and power density
- ▶ Optimized capability of instant high-current discharging
- ▶ Excellent charge acceptance ability
- ▶ Strong high and low temperature performance
- ▶ Low self-discharge rate



Dimension: 181(L) × 77(W) × 170(H) × 170(TH)

Unit: mm

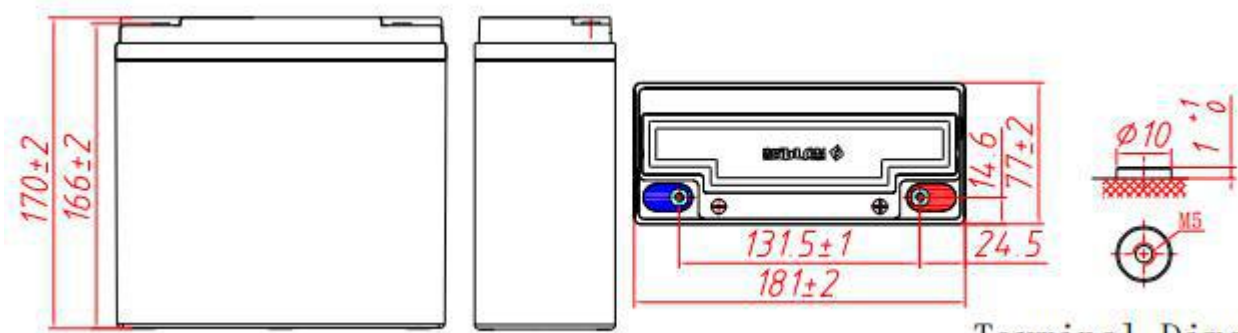

Terminal Dimensions

Specification	
Nominal Voltage	12V
Nominal Capacity	24Ah
Design life	5 years
Terminal	M5
Approx. Weight	Approx 7.05kg (15.5lbs)
Container Material	ABS
Self discharge	3% of capacity declined per month at 25°C
Rated Capacity	
10Hour Rate (2.55A to 10.5V)	25.5Ah
2Hour Rate (12.0A to 10.5V)	24.0Ah
1Hour Rate (19.2A to 10.5V)	19.2Ah
Operating Temperature	
Discharge:	-20 ~50°C (-4~ 122°F)
Charge :	-20 ~50°C (-4~ 122°F)
Storage:	-20 ~50°C (-4~ 122°F)
Charge Method(25 °C)	
Max charge current	3.60A
Float Use:	13.7-13.9V@25
Cycle Use :	14.7-14.9V,@25

Standards

Executive standard :T/ZJXDC 001-2021

Applications


- ▶ Electric vehicle
- ▶ Electric wheelchair
- ▶ Electric scooter
- ▶ Electric play car for children
- ▶ Garbage truck
- ▶ Patrol car

Attain Certificate







Discharge characteristic

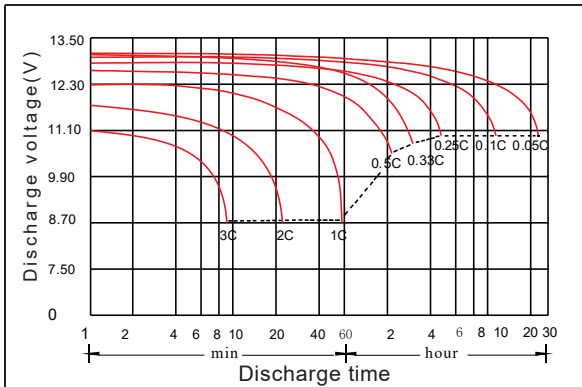


Charging characteristic

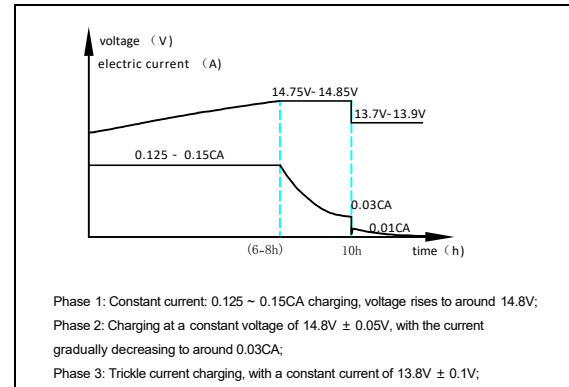

The effect of temperature on capacity

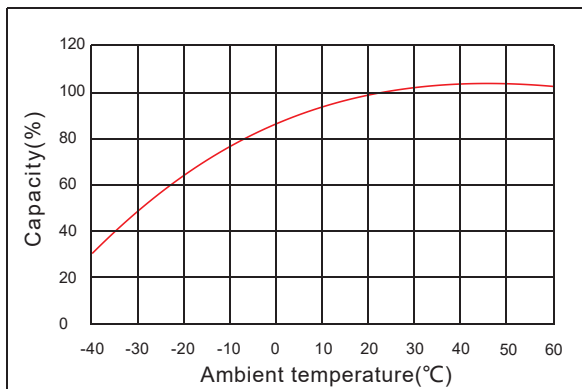

The effect of discharge depth on cycle life

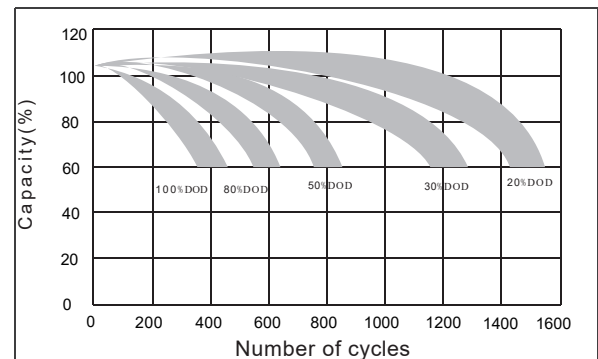

Constant Current Discharge Characteristics Unit:A (25°C,77°F)

FV/Time	5min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	116	62.3	35.9	19.8	12.4	8.40	5.05	3.11	2.63	1.43
1.65V	113	60.5	35.2	19.6	12.3	8.33	5.02	3.09	2.60	1.42
1.70V	108	59.4	34.5	19.5	12.2	8.20	4.96	3.06	2.58	1.42
1.75V	99.4	57.2	34.2	19.2	12.0	8.10	4.90	3.03	2.55	1.41
1.80V	89.1	53.5	32.7	18.7	11.8	8.07	4.78	3.03	2.52	1.40
1.85V	79.6	47.7	29.9	17.3	11.2	7.60	4.54	2.89	2.45	1.38

Constant Power Discharge Characteristics Unit: W/cell (25°C ,77°F)

FV/Time	5min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	195	110	64.8	37.5	23.3	16.0	9.59	6.06	5.05	2.83
1.65V	187	108	64.1	37.2	23.3	15.8	9.53	6.00	4.99	2.82
1.70V	187	107	64.1	36.8	23.2	15.7	9.47	5.98	4.94	2.81
1.75V	174	106	63.8	36.5	23.0	15.6	9.41	5.95	4.91	2.79
1.80V	160	100	62.1	36.2	23.0	15.6	9.29	5.89	4.85	2.78
1.85V	143	89.8	56.9	33.6	21.9	14.8	8.87	5.69	4.77	2.75