




General Features

- High corrosion resistant performance: Pb-Ca multi-alloy grid
- High energy density and power density
- Optimized capability of instant high-current discharging
- Excellent charge acceptance ability
- Excellent deep cycle discharge capability
- Strong high and low temperature performance
- Precision sealing technology
- Long life



Dimension: 330(L)×171(W)×216(H)×219(TH) Unit: mm

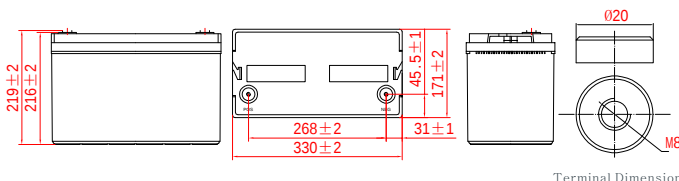

Terminal Dimensions

Applications

- UPS/EPS
- Power systems
- Telecommunications system
- Emergency lighting、Auto control system
- Solar/wind generating storage cyclic
- Other general purpose

Specification

Nominal Voltage	12V
Nominal Capacity	100Ah
Design life	10 years
Terminal	M8
Approx. Weight	Approx 28.0kg (61.7lbs)
Container Material	ABS
Rated Capacity	100Ah 10Hour Rate (10.0A to 10.8V)
	76.2Ah 3Hour Rate (25.4A to 10.2V)
	62.6Ah 1Hour Rate (62.6A to 9.60V)
Internal resistance	Full charged at 25°C: 5.5 mΩ
Max. Discharge Current	1200A(5S)
Operating Temperature	Discharge: -20 ~50°C (-4 ~ 122°F)
	Charge: -20 ~50°C (-4 ~ 122°F)
	Storage: -20 ~50°C (-4 ~ 122°F)
Charge current:	Max. 25A ; Recom. 10A
Charge Method (25 °C)	Float Charge: 13.5-13.8V, recom. 13.8V (-18mV/ °C)
	Equalize charge: 13.8-14.1V, recom. 14.1V (-24mV/ °C)
	Cycle charge: 14.4-15.0V, recom. 14.7V (-30mV/ °C)
Self discharge	3% of capacity declined per month at 25°C

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)


FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	328	218	176	107	76.8	62.6	39.3	35.9	26.0	18.9	17.5	13.9	11.5	10.4	5.46
1.65V	317	216	171	105	76.3	62.2	38.9	35.7	25.8	18.7	17.3	13.8	11.4	10.3	5.44
1.70V	305	215	167	103	75.8	61.8	38.6	35.4	25.4	18.5	17.1	13.7	11.3	10.2	5.40
1.75V	280	212	161	102	74.6	60.8	38.2	34.9	25.1	18.3	16.9	13.5	11.2	10.1	5.38
1.80V	251	206	151	98.0	72.7	59.3	37.8	34.2	25.0	18.1	16.5	13.4	11.1	10.0	5.35
1.85V	224	191	134	89.4	67.3	54.9	36.6	32.5	23.5	17.6	15.7	13.0	10.7	9.70	5.26

Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)


FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	591	396	333	208	152	127	84.4	73.0	53.3	40.0	35.7	29.3	24.0	21.5	11.6
1.65V	568	393	328	206	151	126	83.6	72.8	52.6	39.6	35.5	29.0	23.8	21.3	11.6
1.70V	565	390	324	206	150	125	82.7	72.5	52.3	39.2	35.2	28.7	23.7	21.1	11.5
1.75V	527	387	322	205	149	124	81.9	72.1	52.0	38.8	35.0	28.5	23.5	20.9	11.5
1.80V	484	384	304	201	148	123	81.0	71.9	51.8	38.4	34.6	28.2	23.3	20.7	11.4
1.85V	432	359	272	184	138	115	79.8	68.7	49.3	37.8	33.0	27.7	22.5	20.3	11.3

JM12-100


Discharge characteristic

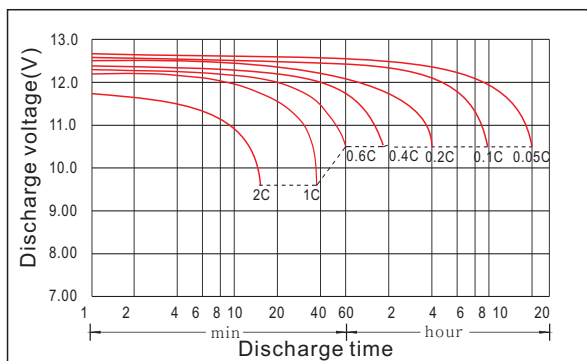


Charging characteristic

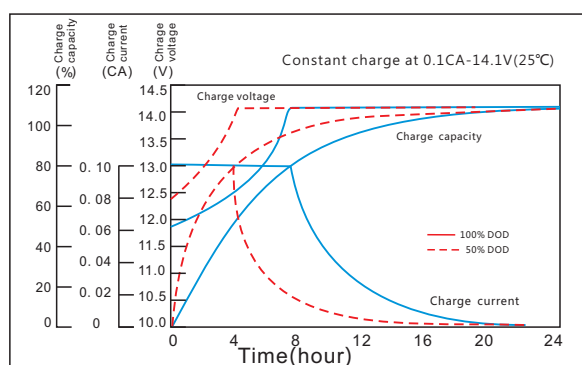


The effect of temperature on capacity

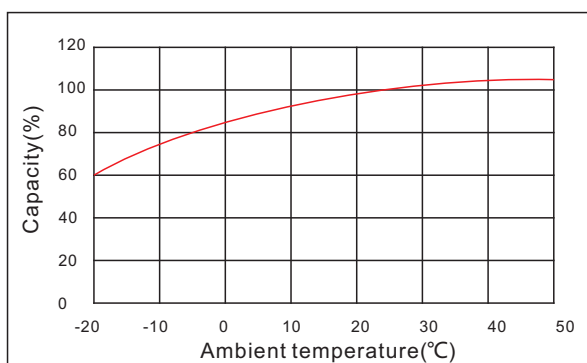


The effect of discharge depth on cycle life

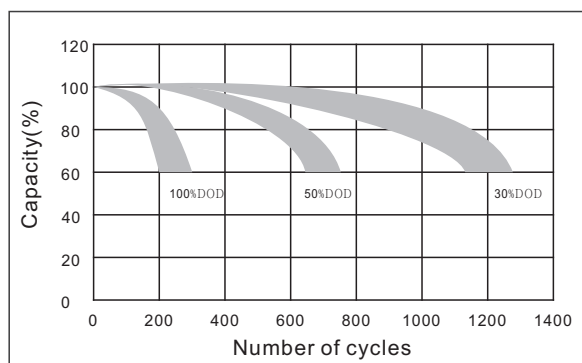

Curves of self-discharge

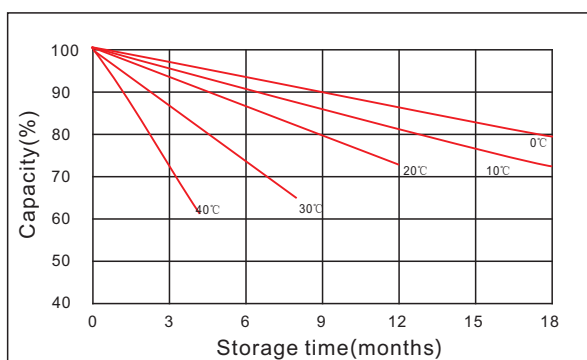

The effect of temperature on float life

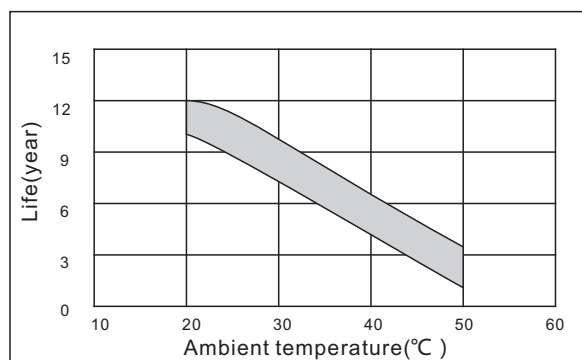

🌐 www.kijo.com.cn ✉ info@kijo.com.cn

Jiangxi Jingjiu Power Science&Technology Co. Ltd.

Add: 1388 Fushan No.1 Street, Xiaolan Economic Development Zone, Nanchang City, Jiangxi Province, China.

☎ +86-791-85982779 ☎ +86-791-85989842

Jiangxi Jingjiu Power (Jiujiang) Co. Ltd.

Add: Xiwang Rd, Aicheng Industrial Park, Yongxiu Country, Jiujiang City, Jiangxi Province, China.

