



Applications

- › UPS/EPS
- › Power systems
- › Telecommunications system
- › Emergency lighting、Auto control system
- › Solar/wind generating storage cyclic
- › Other general purpose

Specification



Nominal Voltage	12V
Nominal Capacity	14.0Ah
Design life	5 years
Terminal	F1/F2
Approx. Weight	Approx3.70kg (8.16lbs)
Container Material	ABS
Rated Capacity	14.0Ah 20Hour Rate (0.70A to 10.5V)
	11.04Ah 3Hour Rate (3.68A to 10.2V)
	9.24Ah 1Hour Rate (9.24A to 9.60V)
Internal resistance	Full charged at 25°C: 18.0 mΩ
Max. Discharge Current	210A(5S)
Operating Temperature	Discharge: -20 ~50°C(-4 ~ 122°F)
	Charge: -20 ~50°C(-4 ~ 122°F)
	Storage: -20 ~50°C(-4 ~ 122°F)
Charge current: Max.3.50A ; Recom.1.40A	
Float Charge:13.5-13.8V,recom.13.8V(-18mV/ °C)	
Equalize charge:13.8-14.1V,recom.14.1V(-24mV/ °C)	
Cycle charge:14.4-15.0V,recom.14.7V(-30mV/ °C)	
Self discharge	3% of capacity declined per month at 25°C

General Features

- › High corrosion resistant performance: Pb-Ca multi-alloy grid
- › High energy density and power density
- › Optimized capability of instant high-current discharging
- › Excellent charge acceptance ability
- › Excellent deep cycle discharge capability
- › Strong high and low temperature performance
- › Precision sealing technology



Dimension: 151(L)×98(W)×95(H)×100(TH) Unit: mm

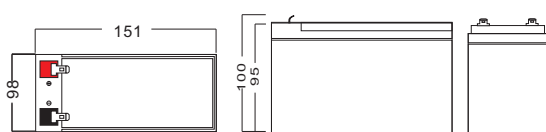

Terminal

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)


FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	55.4	36.3	27.0	17.7	11.3	9.24	5.65	5.29	3.86	3.09	2.63	2.00	1.74	1.39	0.742
1.65V	55.0	34.7	24.8	16.8	10.7	8.68	5.57	5.08	3.75	3.00	2.58	1.98	1.71	1.37	0.728
1.70V	45.1	32.6	23.1	16.3	10.3	8.40	5.45	4.98	3.68	2.84	2.55	1.93	1.68	1.34	0.714
1.75V	41.9	31.1	21.6	15.9	9.95	8.11	5.37	4.86	3.63	2.80	2.44	1.90	1.64	1.32	0.700
1.80V	38.5	29.3	20.0	15.4	9.60	7.83	5.25	4.73	3.43	2.74	2.34	1.86	1.60	1.29	0.672
1.85V	34.4	27.1	17.8	14.1	8.90	7.25	5.09	4.50	3.23	2.66	2.23	1.80	1.53	1.25	0.661

Constant Power Discharge Characteristics Unit: W/cell(25°C, 77°F)


FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	104	65.3	49.5	29.9	20.3	16.9	11.4	9.92	7.30	5.86	4.97	3.95	3.28	2.69	1.47
1.65V	95.9	61.8	46.4	29.7	19.1	15.9	11.1	9.54	7.09	5.67	4.88	3.86	3.23	2.63	1.43
1.70V	87.7	60.0	44.3	29.6	18.5	15.4	11.0	9.36	6.98	5.39	4.74	3.83	3.19	2.61	1.42
1.75V	79.6	58.1	42.7	29.3	18.0	15.0	10.8	9.15	6.88	5.32	4.64	3.74	3.06	2.55	1.39
1.80V	71.4	56.2	40.8	29.1	17.8	14.8	10.6	9.08	6.70	5.27	4.53	3.67	2.96	2.50	1.38
1.85V	63.7	52.5	36.5	26.6	16.6	13.8	10.4	8.68	6.38	5.19	4.32	3.61	2.83	2.46	1.37

JS12-14


Discharge characteristic

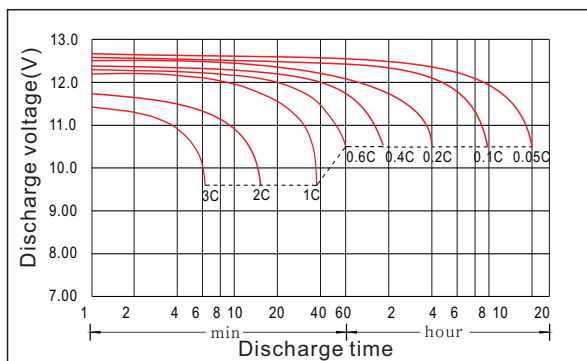


Charging characteristic

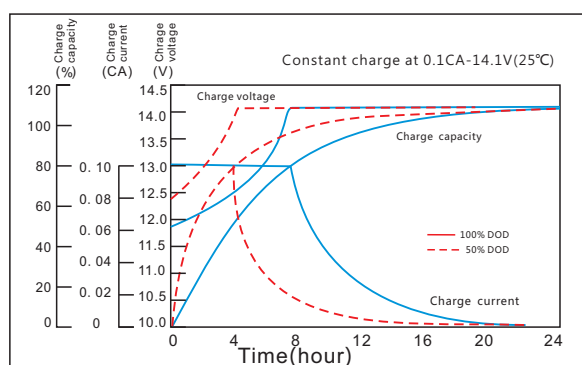


The effect of temperature on capacity

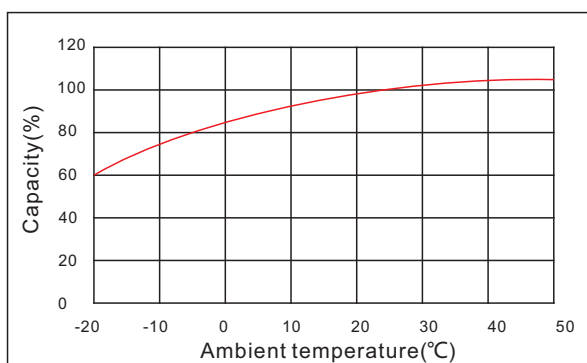


The effect of discharge depth on cycle life

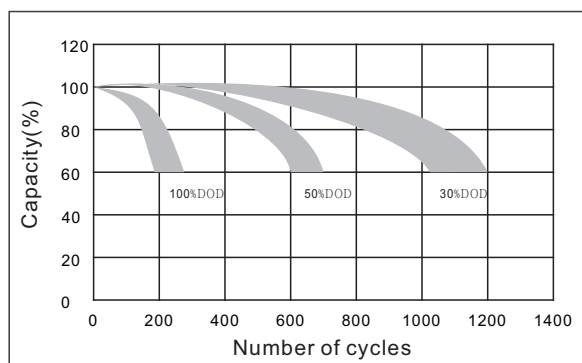

Curves of self-discharge

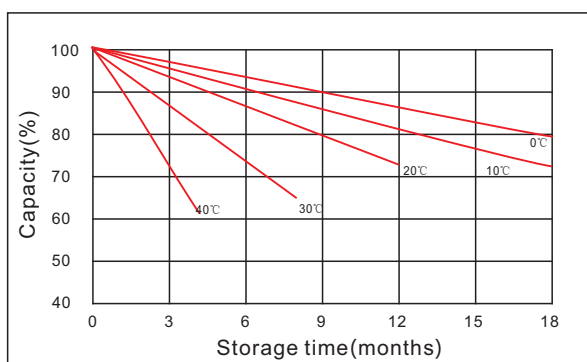

The effect of temperature on float life

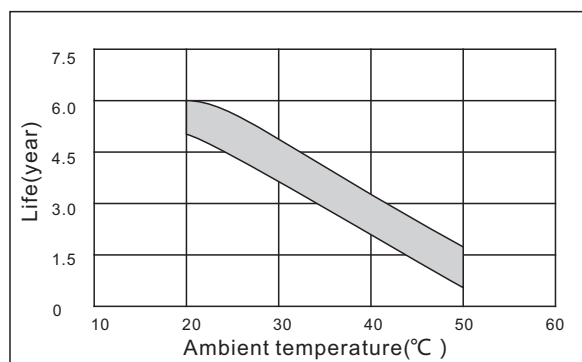

© www.kijo.com.cn ✉ info@kijo.com.cn

Jiangxi Jingjiu Power Science&Technology Co. Ltd.

Add: 1388 Fushan No.1 Street, Xiaolan Economic Development Zone, Nanchang City, Jiangxi Province, China.

☎ +86-791-85982779 ☎ +86-791-85989842

Jiangxi Jingjiu Power (Jiujiang) Co. Ltd.

Add: Xiwang Rd, Aicheng Industrial Park, Yongxiu Country, Jiujiang City, Jiangxi Province, China.

